

BEF HOME
fire for your heart



CATALOGUE OF HOT AIR FIREPLACE INSERTS




BEF ROYAL V 6 C

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

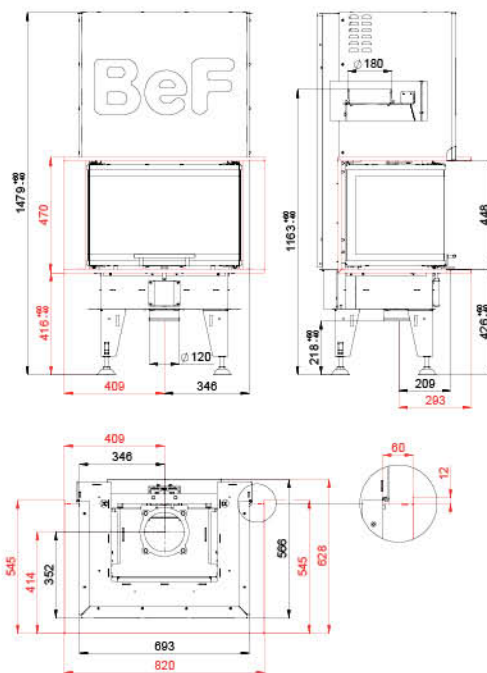

4 - 7 kW



82 %



180 mm



330 mm



400 x 251 mm



624 x 400 x 400 mm



12 Pa



1,85 kg/h



262 °C



4,6 g/s



0,0873 %



19 mg/Nm³



232 kg


BEF ROYAL V 6 U

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

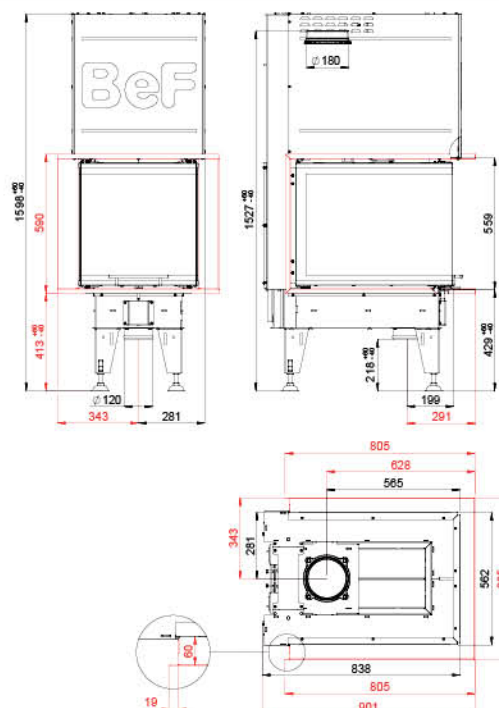

4 - 7 kW



82 %



180 mm



400 mm



282 x 491 mm



500 x 660 x 510 mm



12 Pa



1,85 kg/h



262 °C



4,6 g/s



0,0873 %



19 mg/Nm³



327 kg




BEF ROYAL 7

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

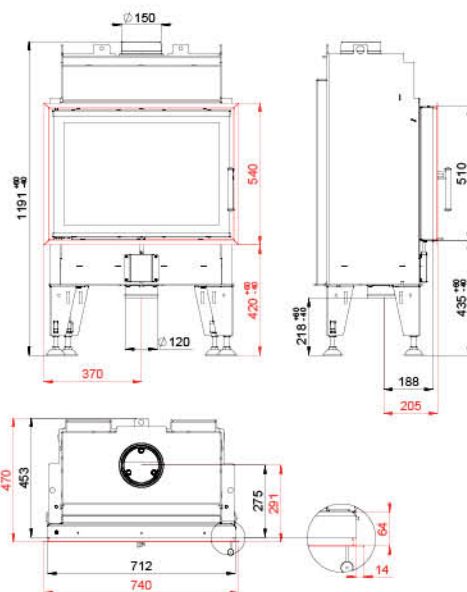

5 - 8 kW
 82 %
 150 mm
 400 mm
 520 x 295 mm
 1x 670 x 468 mm

12 Pa
 2,05 kg/h
 264 °C
 5,6 g/s
 0,0868 %
 19 mg/Nm³
 174 kg


BEF ROYAL 7 CL/CP

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229


eco
design

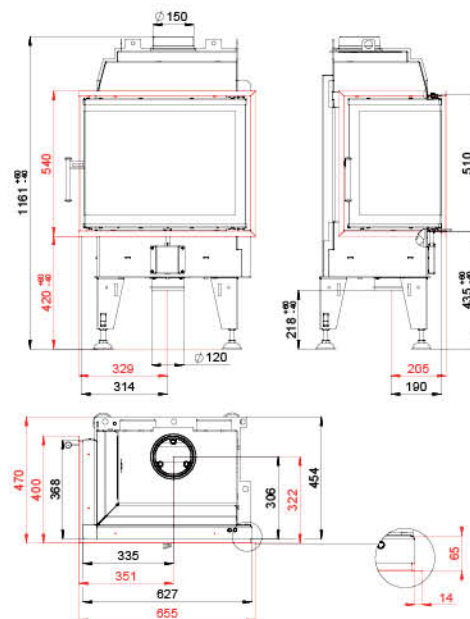

5 - 8 kW
 82 %
 150 mm
 330 mm
 465 x 295 mm
 1x 600 x 340 x 468 mm

12 Pa
 2,05 kg/h
 264 °C
 5,6 g/s
 0,0868 %
 19 mg/Nm³
 146 kg

BEF ROYAL V 7

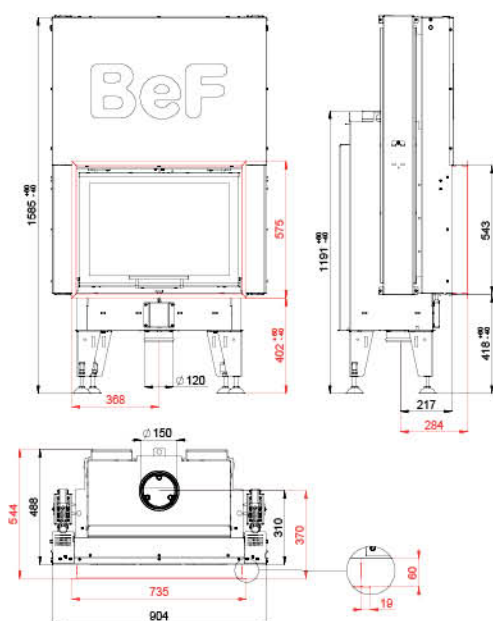

5 - 8 kW
 82 %
 150 mm
 400 mm
 520 x 295 mm
 1x
 670 x 468 mm

12 Pa
 2,05 kg/h
 264 °C
 5,6 g/s
 0,0868 %
 19 mg/Nm³
 251 kg




BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

BEF ROYAL V 7 CL/CP

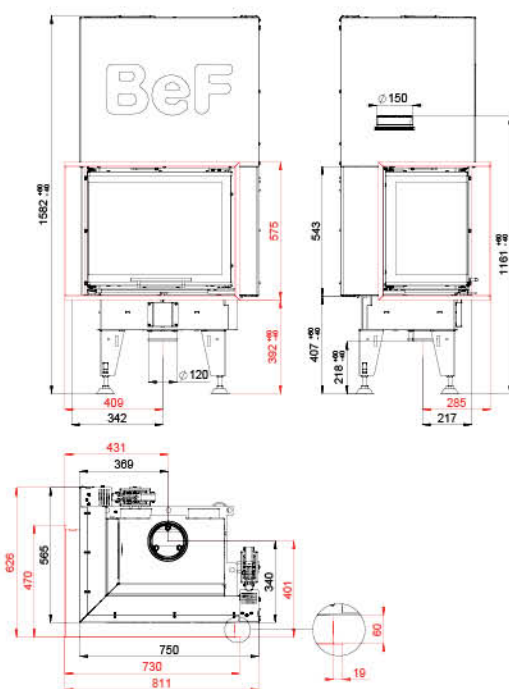

5 - 8 kW
 82 %
 150 mm
 330 mm
 465 x 295 mm
 1x
 600 x 340 x 468 mm

12 Pa
 2,05 kg/h
 264 °C
 5,6 g/s
 0,0868 %
 19 mg/Nm³
 247 kg



BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design


BEF ROYAL 8

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

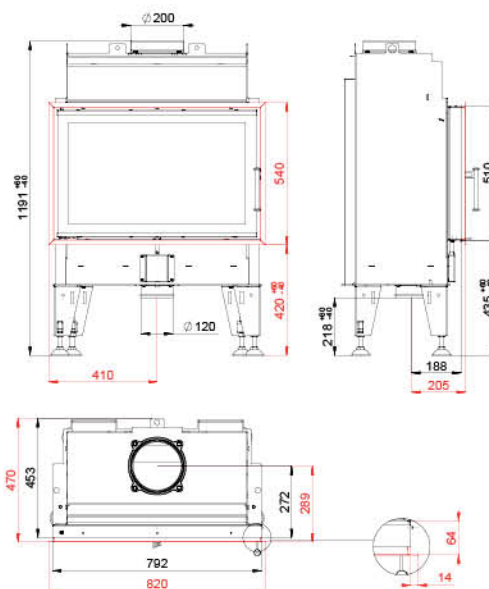

7 - 10 kW 84 % 200 mm 500 mm 600 x 295 mm 750 x 468 mm

12 Pa 2,7 kg/h 257 °C 6 g/s 0,0868 % 18 mg/Nm³ 189 kg


BEF ROYAL 8 CL/CP

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229


eco
design

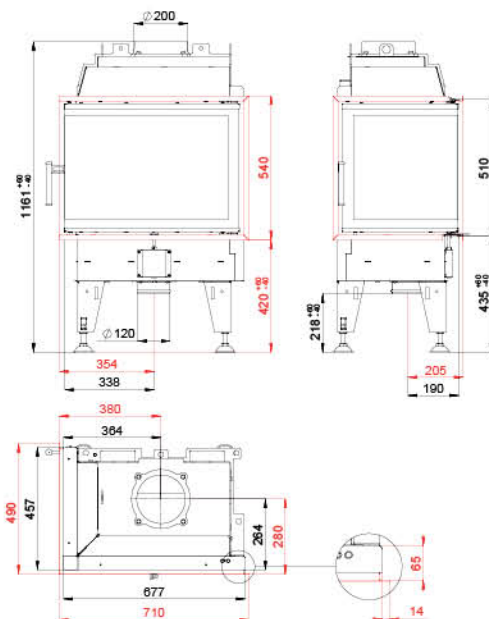

7 - 10 kW 84 % 200 mm 400 mm 515 x 295 mm 650 x 430 x 468 mm

12 Pa 2,7 kg/h 257 °C 6 g/s 0,0868 % 18 mg/Nm³ 157 kg


BEF ROYAL V 8

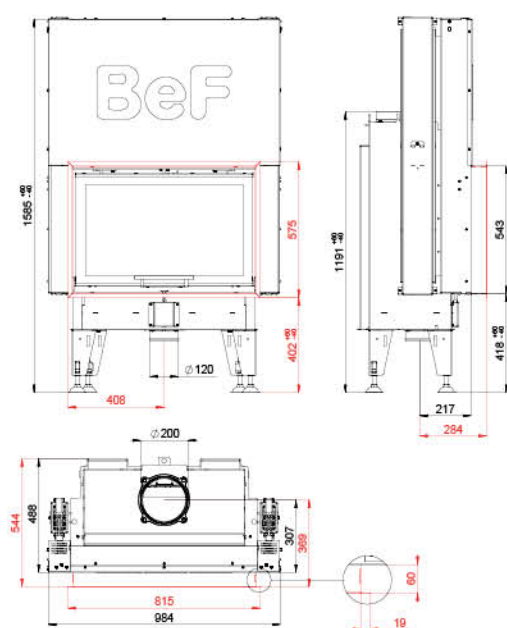BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

7 - 10 kW 84 % 200 mm 500 mm 600 x 295 mm 750 x 468 mm

12 Pa 2,7 kg/h 257 °C 6 g/s 0,0868 % 18 mg/Nm³ 268 kg

BEF ROYAL V 8 CL/CP

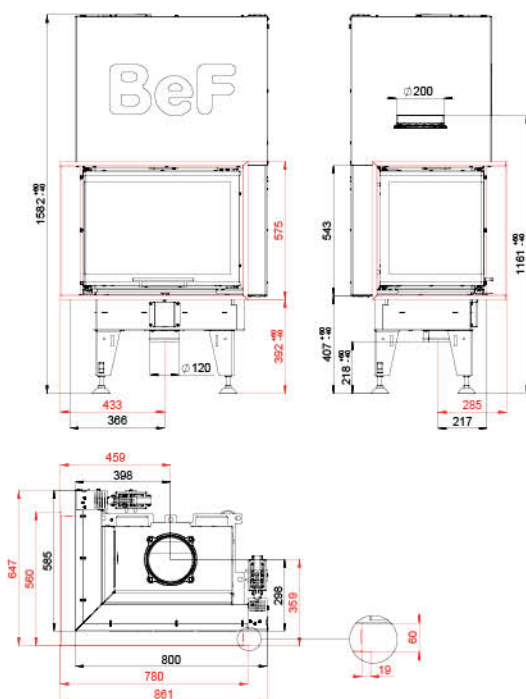BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

7 - 10 kW 84 % 200 mm 400 mm 515 x 295 mm 650 x 430 x 468 mm

12 Pa 2,7 kg/h 257 °C 6 g/s 0,0868 % 18 mg/Nm³ 250 kg


BEF ROYAL V 8 C

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

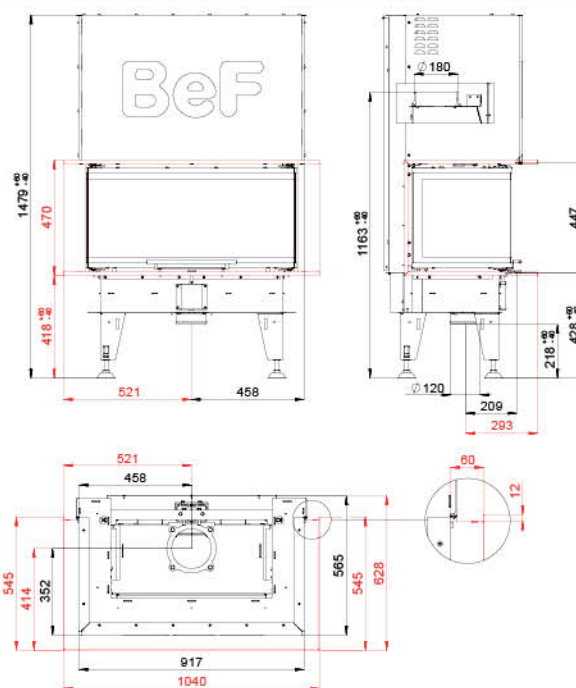


BEF ROYAL V 8 U

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

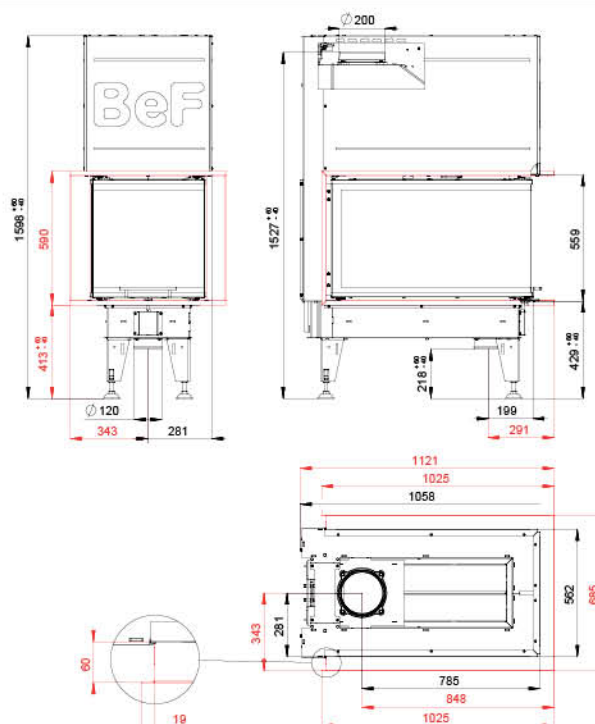




BEF ROYAL V 10 C

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

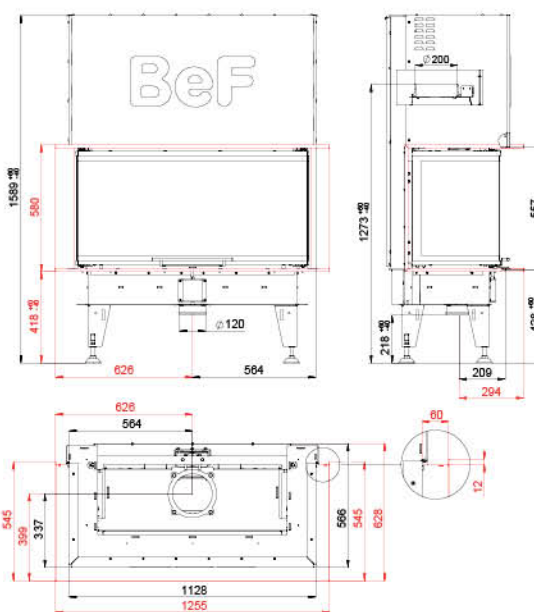

11 - 14 kW 84 % 200 mm 660 mm 836 x 251 mm 1060 x 400 x 510 mm

12 Pa 3,6 kg/h 235 °C 10,2 g/s 0,0877 % 11 mg/Nm³ 337 kg


BEF ROYAL V 10 U

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

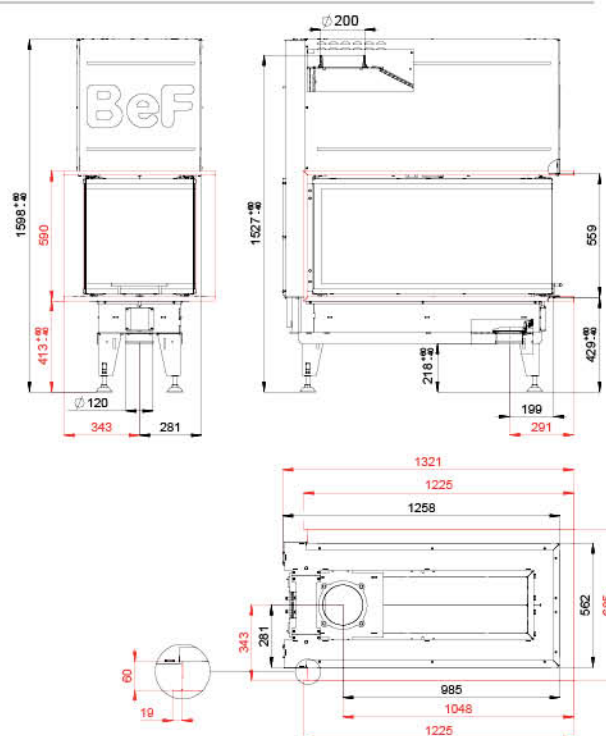

11 - 14 kW 84 % 200 mm 800 mm 265 x 911 mm 500 x 1080 x 510 mm

12 Pa 3,6 kg/h 235 °C 10,2 g/s 0,0877 % 11 mg/Nm³ 453 kg




BEF THERM 6

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

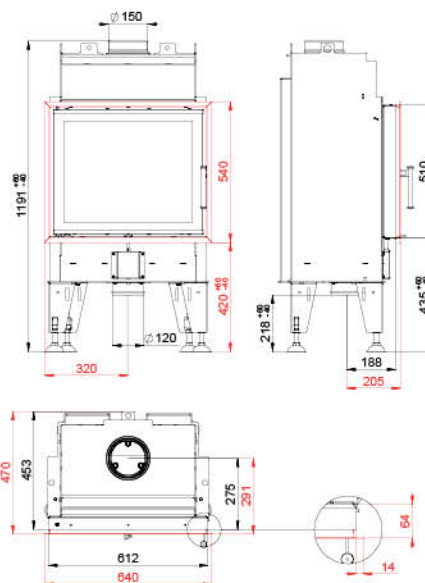

4 - 7 kW 82 % 150 mm 250 mm 435 x 295 mm 570 x 468 mm

12 Pa 1,85 kg/h 262 °C 4,6 g/s 0,0873 % 19 mg/Nm³ 147 kg


BEF THERM 6 CL/CP

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229


eco
design

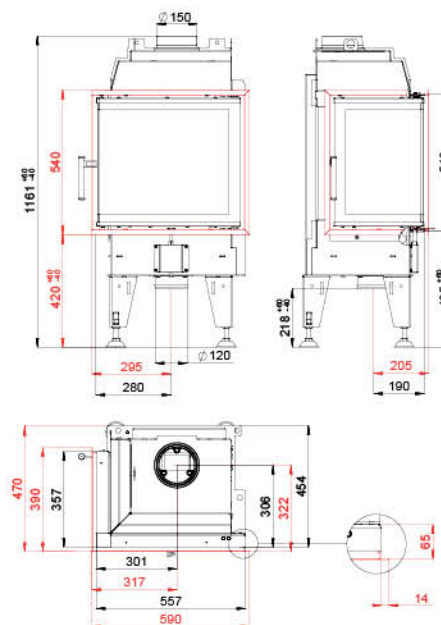

4 - 7 kW 82 % 150 mm 250 mm 395 x 295 mm 530 x 330 x 468 mm

12 Pa 1,85 kg/h 262 °C 4,6 g/s 0,0873 % 19 mg/Nm³ 126 kg

BEF THERM V 6

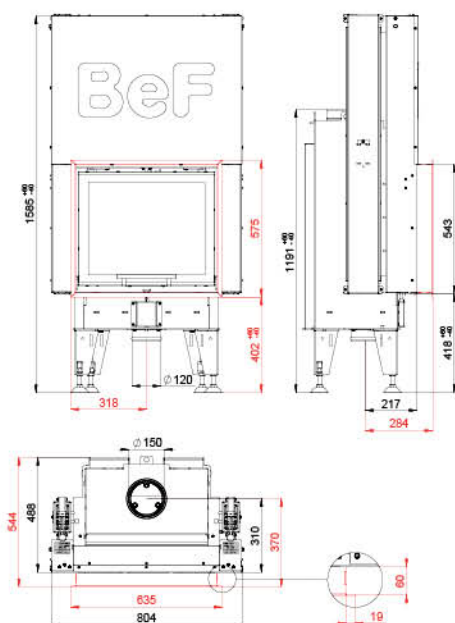

4 - 7 kW
 82 %
 150 mm
 250 mm
 435 x 295 mm
 570 x 468 mm

12 Pa
 1,85 kg/h
 262 °C
 4,6 g/s
 0,0873 %
 19 mg/Nm³
 227 kg




BImSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

BEF THERM V 6 CL/CP

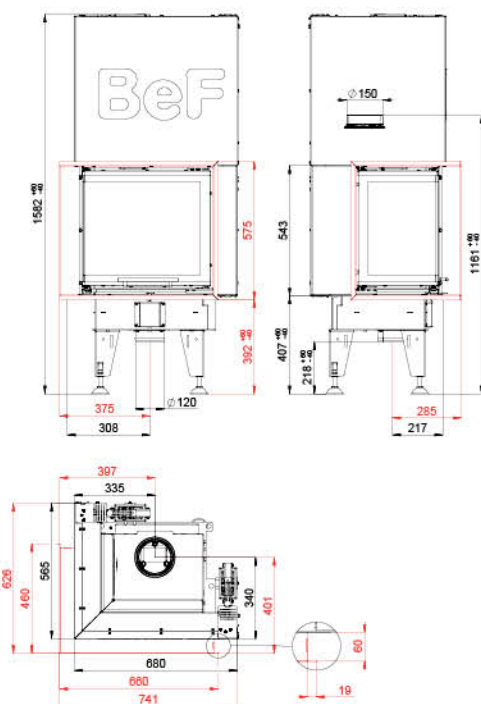

4 - 7 kW
 82 %
 150 mm
 250 mm
 395 x 295 mm
 530 x 330 x 468 mm

12 Pa
 1,85 kg/h
 262 °C
 4,6 g/s
 0,0873 %
 19 mg/Nm³
 236 kg



BImSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design


BEF THERM 6 C

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

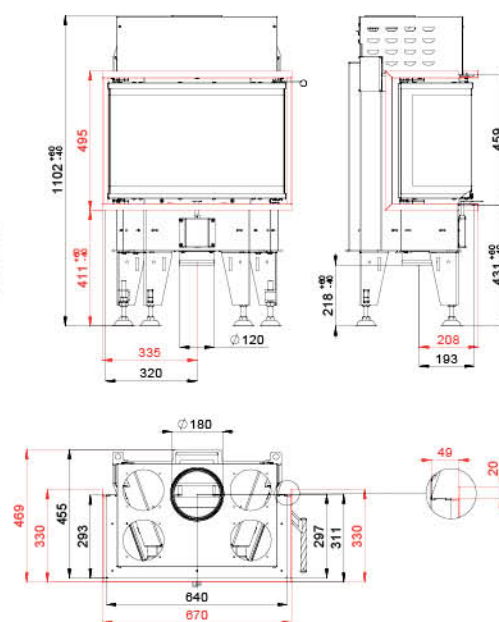

4 - 7 kW 82 % 180 mm 250 mm 465 x 295 mm 624 x 250 x 400 mm

12 Pa 1,85 kg/h 262 °C 4,6 g/s 0,0873 % 19 mg/Nm³ 130 kg


BEF THERM V 6 C

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

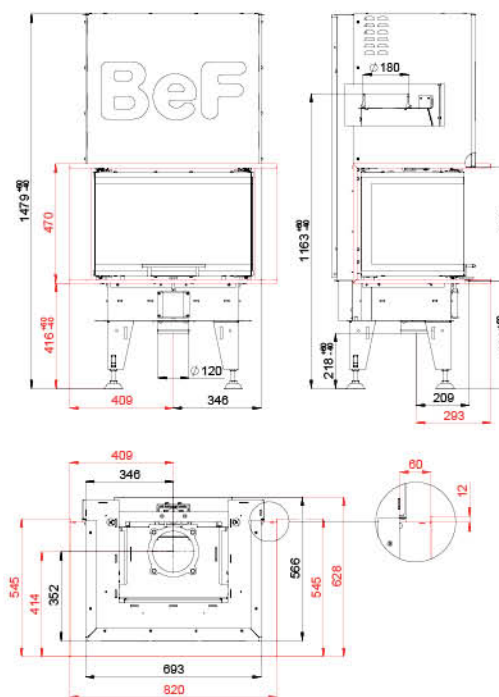


4 - 7 kW 82 % 180 mm 330 mm 400 x 251 mm 624 x 400 x 400 mm

12 Pa 1,85 kg/h 262 °C 4,6 g/s 0,0873 % 19 mg/Nm³ 227 kg



BEF THERM V 6 U

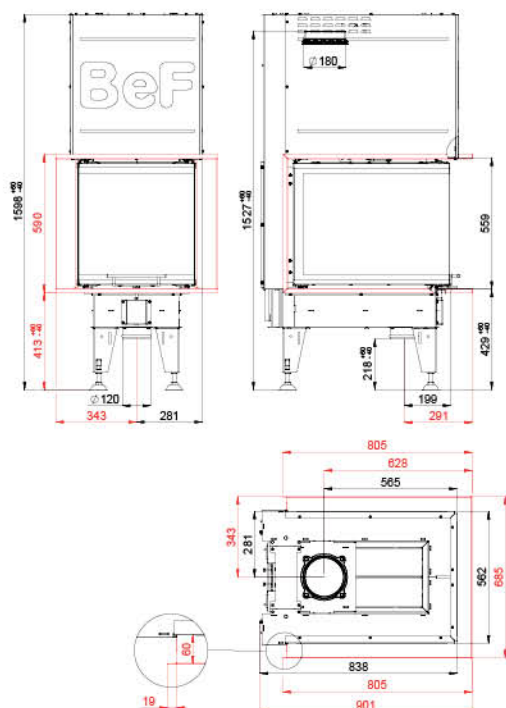

4 - 7 kW
 82 %
 180 mm
 400 mm
 282 x 491 mm
 500 x 660 x 510 mm

12 Pa
 1,85 kg/h
 262 °C
 4,6 g/s
 0,0873 %
 19 mg/Nm³
 322 kg



BImSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design


BEF THERM 7

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

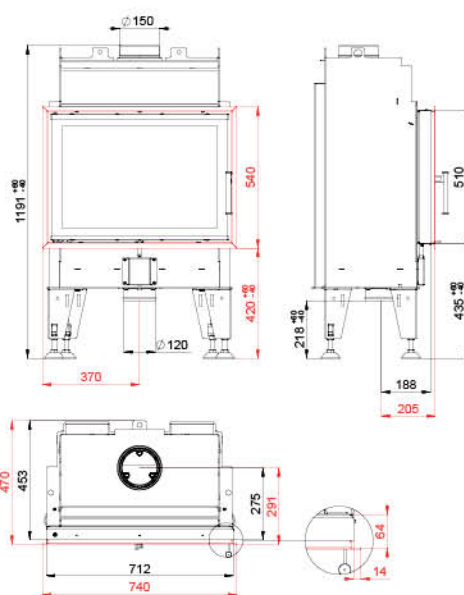

5 - 8 kW 82 % 150 mm 400 mm 520 x 295 mm 670 x 468 mm

12 Pa 2,05 kg/h 264 °C 5,6 g/s 0,0868 % 19 mg/Nm³ 169 kg


BEF THERM 7 CL/CP

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229


eco
design

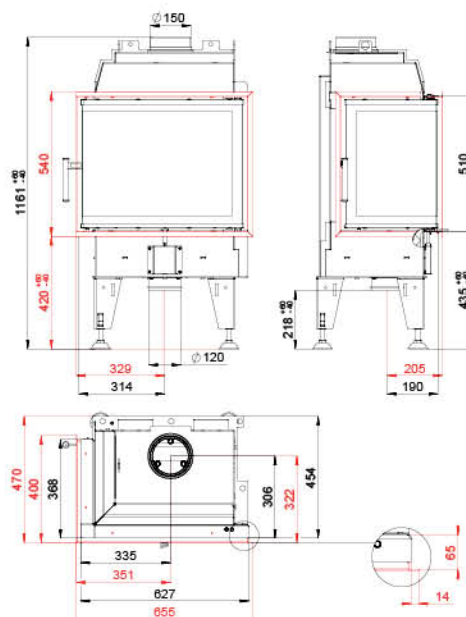


5 - 8 kW 82 % 150 mm 330 mm 465 x 295 mm 600 x 340 x 468 mm

12 Pa 2,05 kg/h 264 °C 5,6 g/s 0,0868 % 19 mg/Nm³ 141 kg

BEF THERM V 7

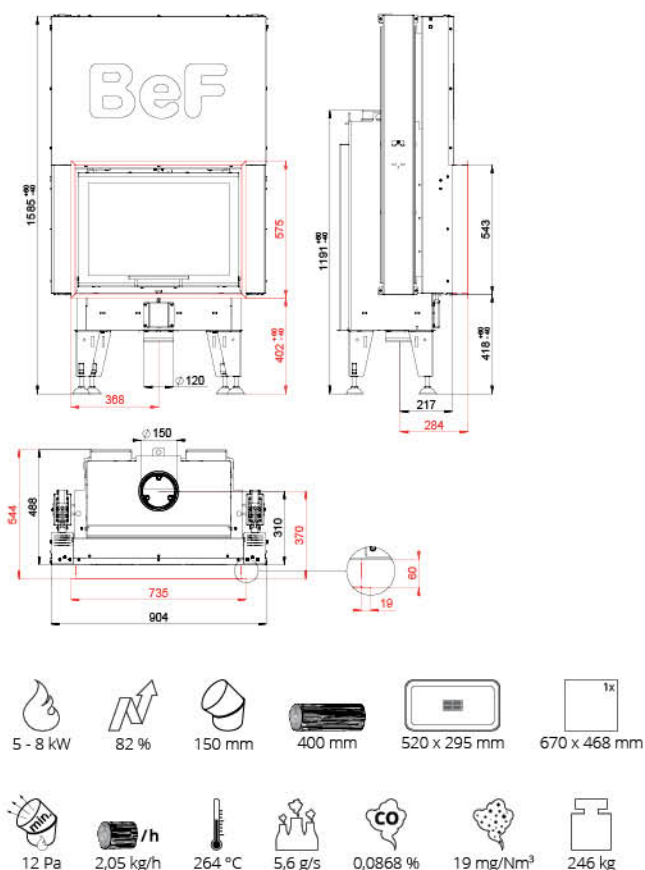BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

BEF THERM V 7 CL/CP

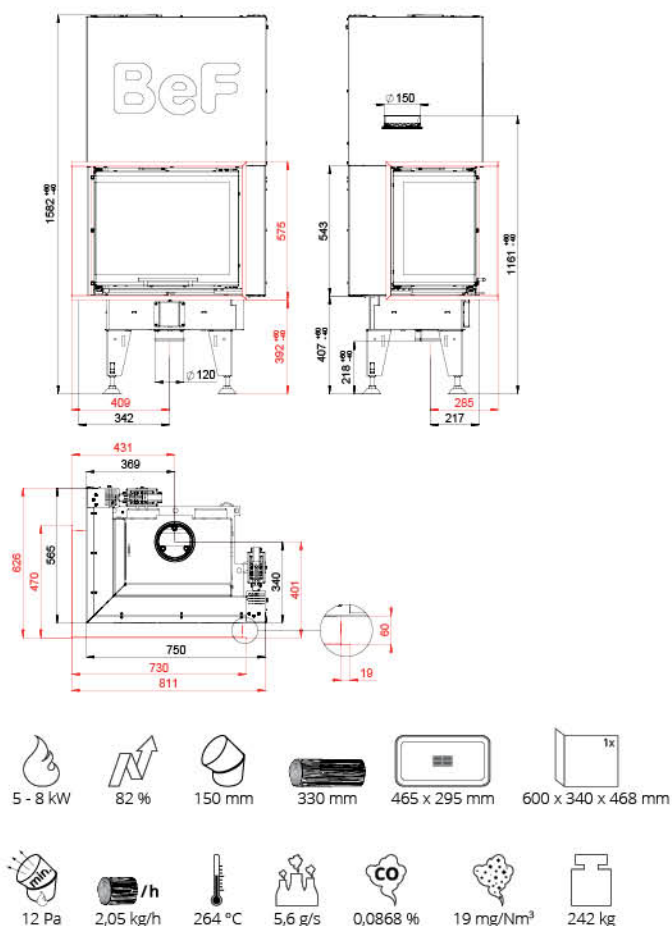BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design


BEF THERM 8

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

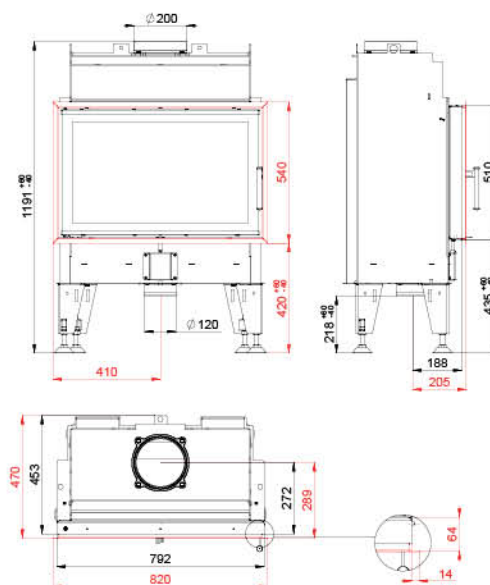

7 - 10 kW 84 % 200 mm 500 mm 600 x 295 mm 750 x 468 mm

12 Pa 2,7 kg/h 257 °C 6 g/s 0,0868 % 18 mg/Nm³ 184 kg


BEF THERM 8 CL/CP

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

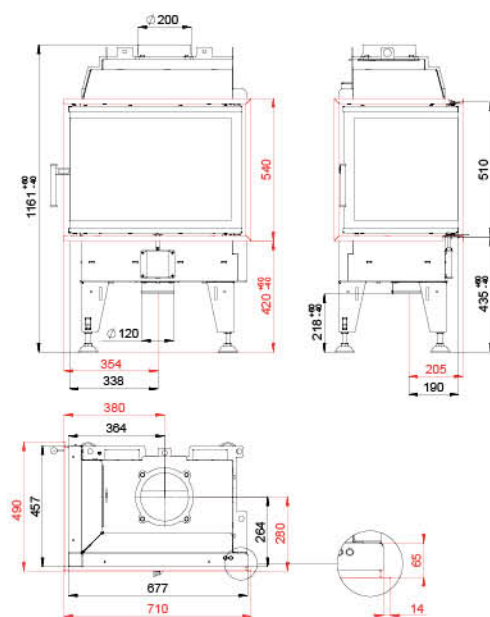

7 - 10 kW 84 % 200 mm 400 mm 515 x 295 mm 650 x 430 x 468 mm

12 Pa 2,7 kg/h 257 °C 6 g/s 0,0868 % 18 mg/Nm³ 152 kg




BEF THERM V 8

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

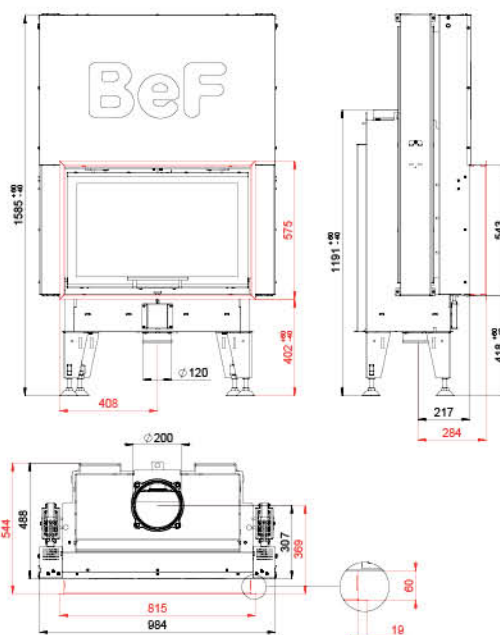

7 - 10 kW 84 % 200 mm 500 mm 600 x 295 mm 750 x 468 mm

12 Pa 2,7 kg/h 257 °C 6 g/s 0,0868 % 18 mg/Nm³ 263 kg


BEF THERM V 8 CL/CP

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229



eco
design

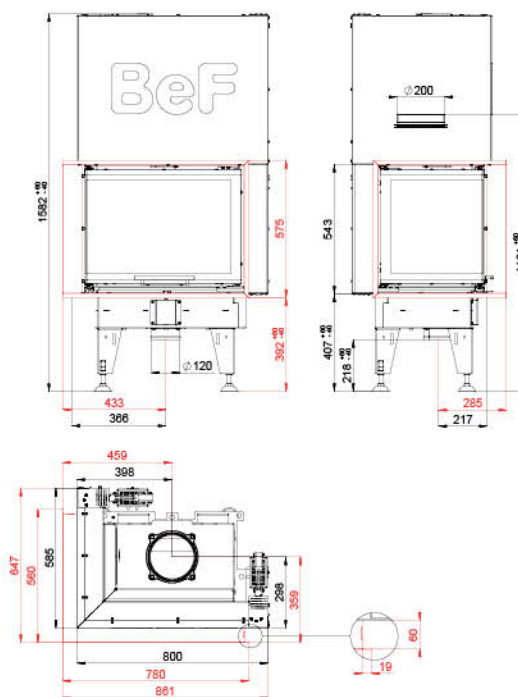



7 - 10 kW 84 % 200 mm 400 mm 515 x 295 mm 650 x 430 x 468 mm

12 Pa 2,7 kg/h 257 °C 6 g/s 0,0868 % 18 mg/Nm³ 245 kg

BEF THERM V 8 C

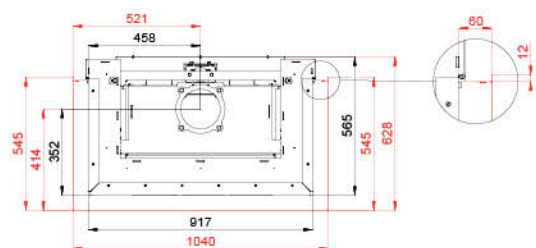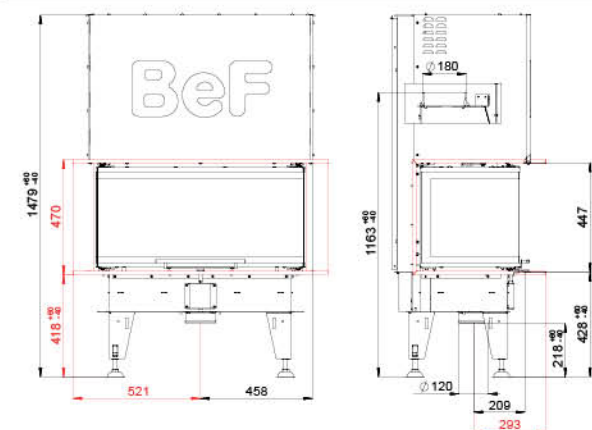BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

BEF THERM V 8 U

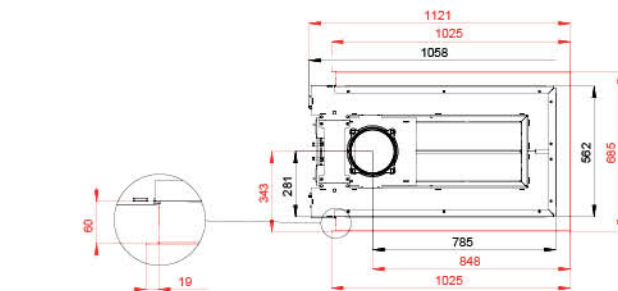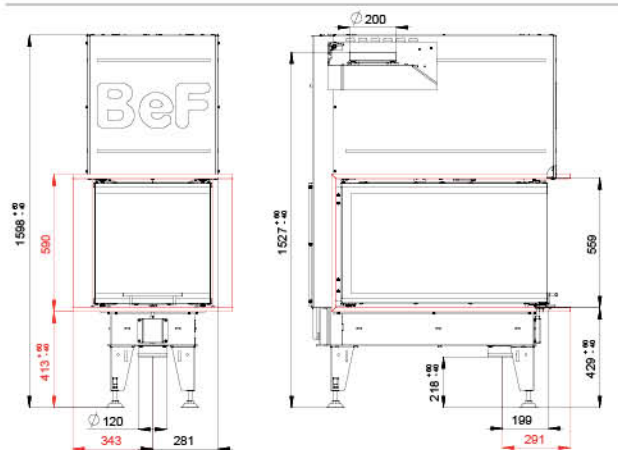BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design


BEF THERM 10

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

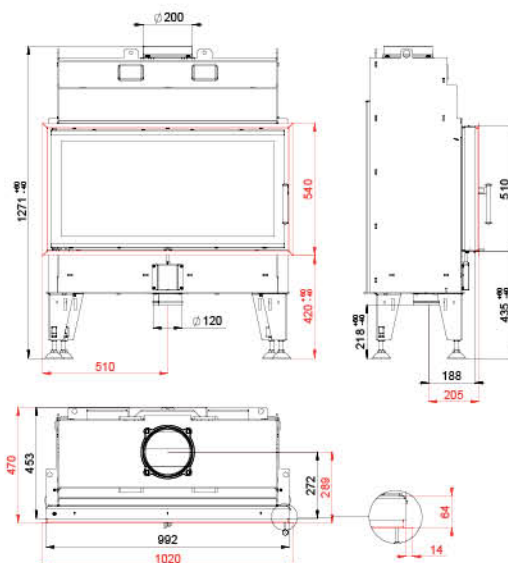

11 - 14 kW 84 % 200 mm 660 mm 800 x 295 mm 950 x 468 mm

12 Pa 3,6 kg/h 235 °C 10,2 g/s 0,0877 % 11 mg/Nm³ 243 kg


BEF THERM V 10

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

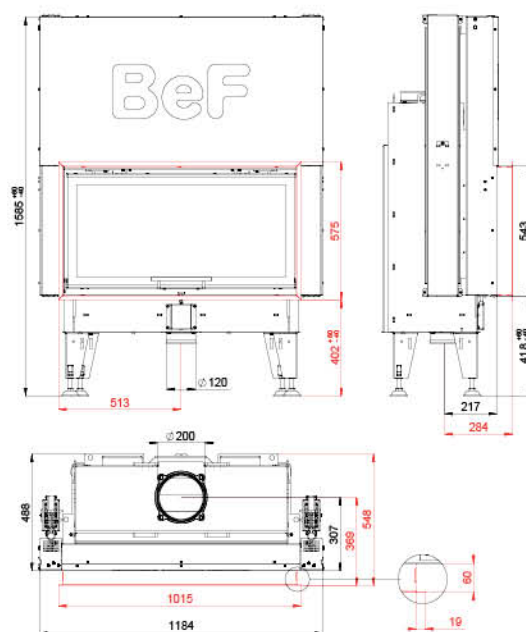


11 - 14 kW 84 % 200 mm 660 mm 800 x 295 mm 950 x 468 mm

12 Pa 3,6 kg/h 235 °C 10,2 g/s 0,0877 % 11 mg/Nm³ 337 kg



BEF THERM V 10 CL/CP

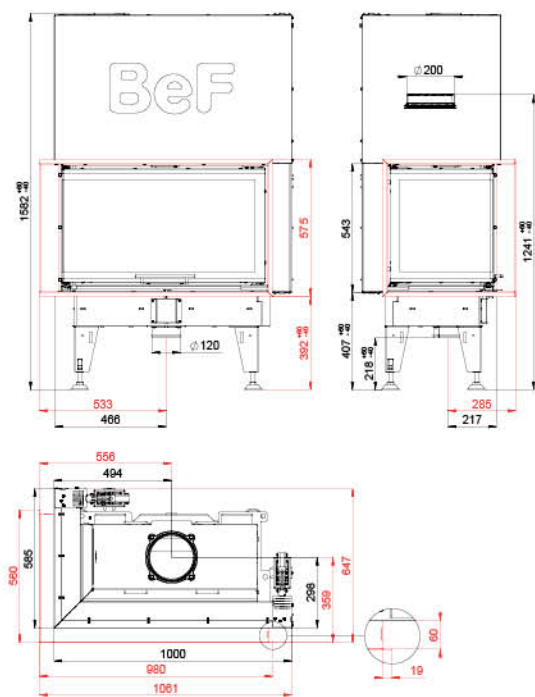

11 - 14 kW
 84 %
 200 mm
 660 mm
 715 x 295 mm
 1x
 850 x 430 x 468 mm

12 Pa
 3,6 kg/h
 235 °C
 10,2 g/s
 0,0877 %
 11 mg/Nm³
 287 kg



BImSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design


BEF THERM V 10 C

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

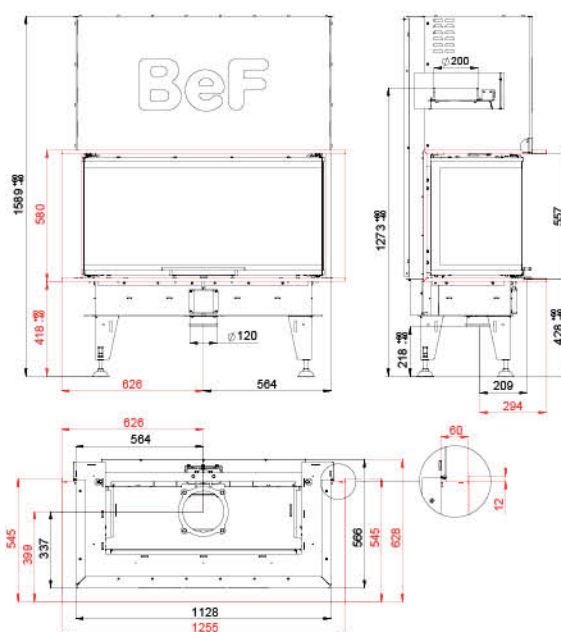

11 - 14 kW 84 % 200 mm 660 mm 836 x 251 mm 1060 x 400 x 510 mm

12 Pa 3,6 kg/h 235 °C 10,2 g/s 0,0877 % 11 mg/Nm³ 332 kg


BEF THERM V 10 U

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229


eco
design

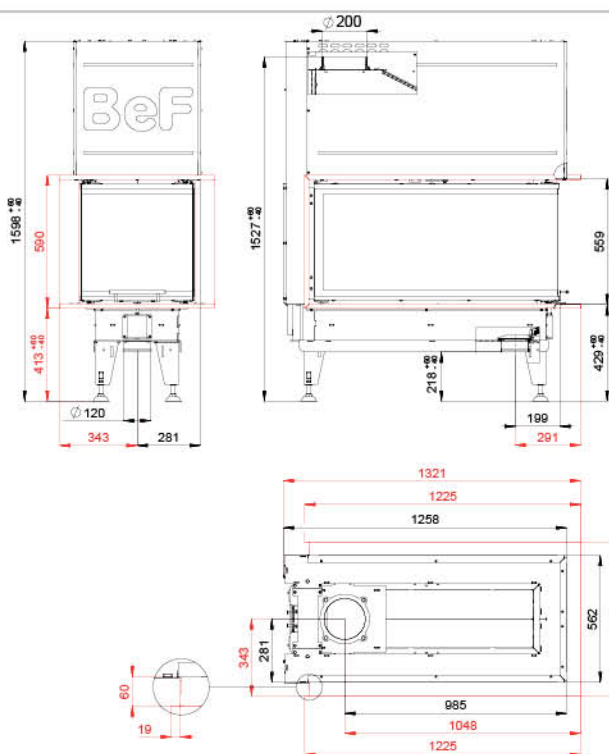

11 - 14 kW 84 % 200 mm 800 mm 265 x 911 mm 500 x 1080 x 510 mm

12 Pa 3,6 kg/h 235 °C 10,2 g/s 0,0877 % 11 mg/Nm³ 448 kg


BEF THERM V 12

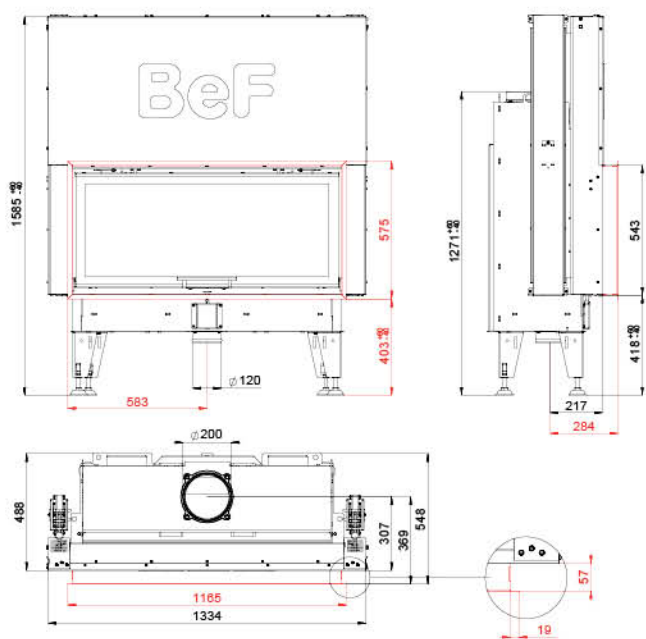BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

11,5 - 14,5 kW 80 % 200 mm 800 mm 954 x 298 mm 1100 x 468 mm

10 Pa 4 kg/h 256 °C 12 g/s 0,0898 % 30 mg/Nm³ 354 kg

BEF THERM V 14

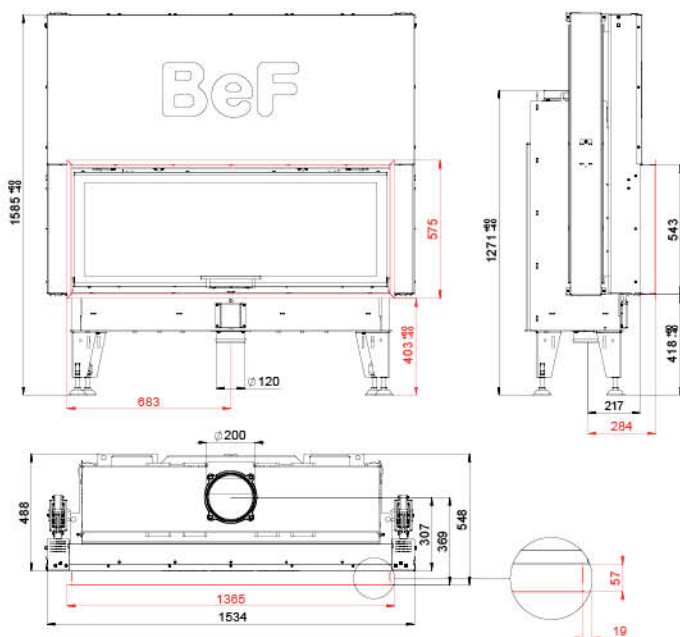BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

12 - 15 kW 82 % 200 mm 1000 mm 1154 x 298 mm 1300 x 468 mm

10 Pa 4 kg/h 262 °C 10,3 g/s 0,0985 % 26 mg/Nm³ 406 kg


BEF FEEL 6

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

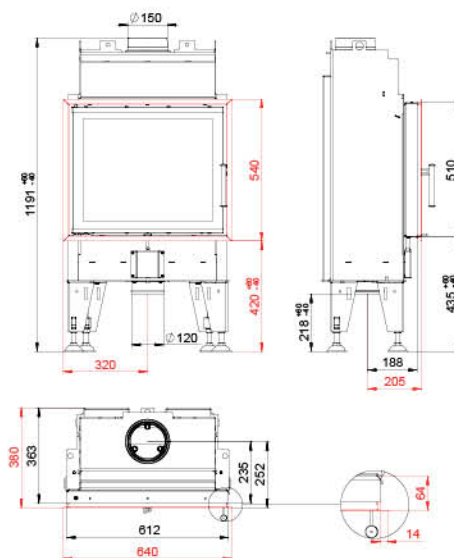

3 - 6 kW
 84 %
 150 mm
 250 mm
 435 x 220 mm
 1x 570 x 468 mm

12 Pa
 1,53 kg/h
 206 °C
 4,3 g/s
 0,0946 %
 17 mg/Nm³
 126 kg


BEF FEEL 6 CL/CP

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

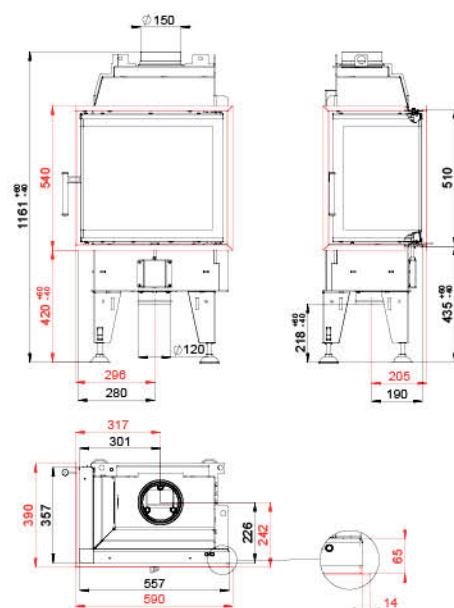

3 - 6 kW
 84 %
 150 mm
 250 mm
 395 x 215 mm
 1x 530 x 330 x 468 mm

12 Pa
 1,53 kg/h
 206 °C
 4,3 g/s
 0,0946 %
 17 mg/Nm³
 114 kg




BEF FEEL V 6

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

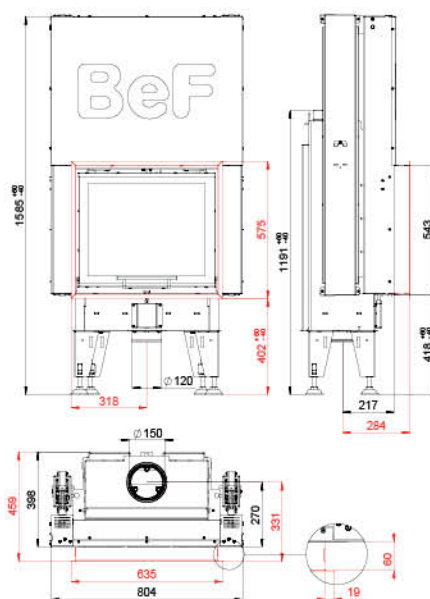

3 - 6 kW 84 % 150 mm 250 mm 435 x 220 mm 570 x 468 mm

12 Pa 1,53 kg/h 206 °C 4,3 g/s 0,0946 % 17 mg/Nm³ 199 kg


BEF FEEL V 6 CL/CP

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

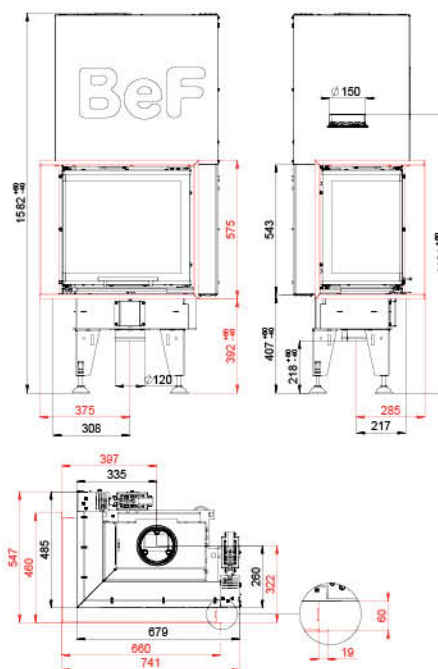


3 - 6 kW 84 % 150 mm 250 mm 395 x 215 mm 530 x 330 x 468 mm

12 Pa 1,53 kg/h 206 °C 4,3 g/s 0,0946 % 17 mg/Nm³ 203 kg



BEF FEEL 6 C

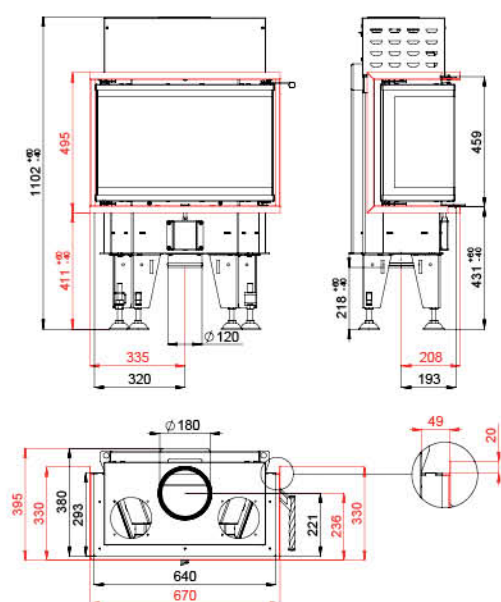

BImSchV
Stufe 2

15a
B - VG


ČSN EN
13229

eco
design

3 - 6 kW
 84 %
 180 mm
 250 mm
 435 x 220 mm
 624 x 250 x 400 mm

12 Pa
 1,53 kg/h
 206 °C
 4,3 g/s
 0,0946 %
 17 mg/Nm³
 115 kg


BEF FEEL 7

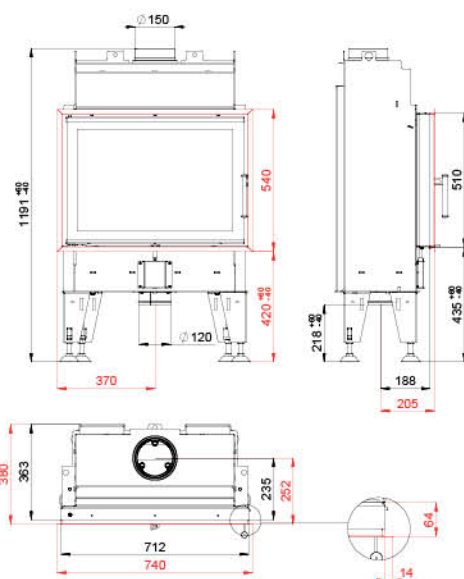BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

4 - 7 kW
 82 %
 150 mm
 400 mm
 520 x 220 mm
 1x 670 x 468 mm

12 Pa
 2,47 kg/h
 232 °C
 6,5 g/s
 0,0811 %
 18 mg/Nm³
 137 kg


BEF FEEL 7 CL/CP

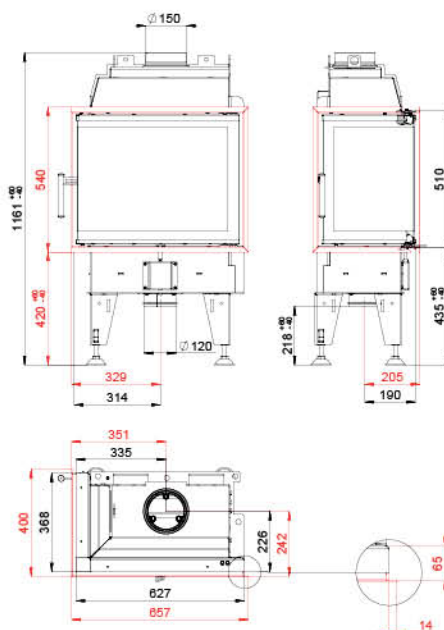BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

4 - 7 kW
 82 %
 150 mm
 330 mm
 465 x 215 mm
 1x 600 x 340 x 468 mm

12 Pa
 2,47 kg/h
 232 °C
 6,5 g/s
 0,0811 %
 18 mg/Nm³
 124 kg

BEF FEEL V 7

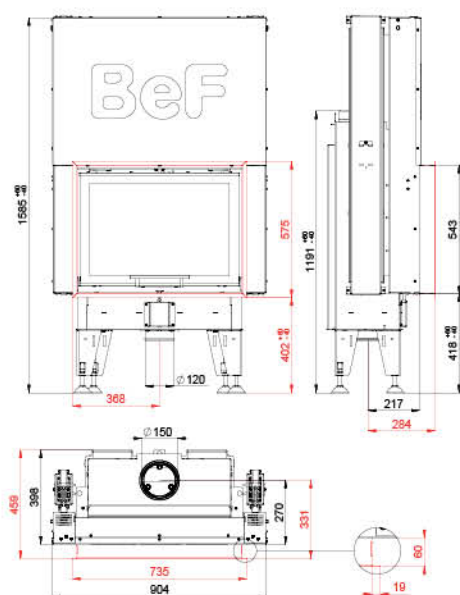

4 - 7 kW
 82 %
 150 mm
 400 mm
 520 x 220 mm
 670 x 468 mm

12 Pa
 2,47 kg/h
 232 °C
 6,5 g/s
 0,0811 %
 18 mg/Nm³
 214 kg




BImSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

BEF FEEL V 7 CL/CP

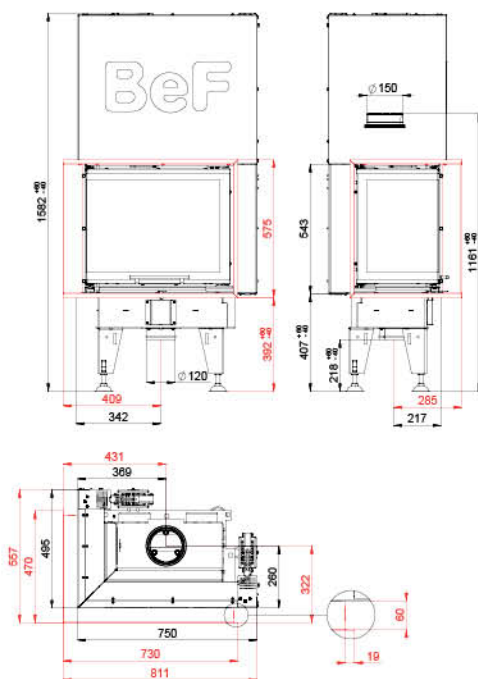

4 - 7 kW
 82 %
 150 mm
 330 mm
 465 x 215 mm
 600 x 340 x 468 mm

12 Pa
 2,47 kg/h
 232 °C
 6,5 g/s
 0,0811 %
 18 mg/Nm³
 213 kg



BImSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design


BEF FEEL 8

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

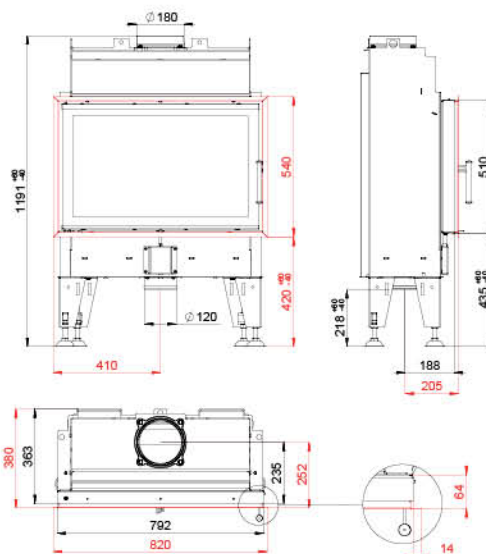

5 - 8 kW 85 % 180 mm 500 mm 600 x 220 mm 750 x 468 mm

12 Pa 2,54 kg/h 212 °C 6 g/s 0,0932 % 16 mg/Nm³ 149 kg


BEF FEEL 8 CL/CP

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229


eco
design

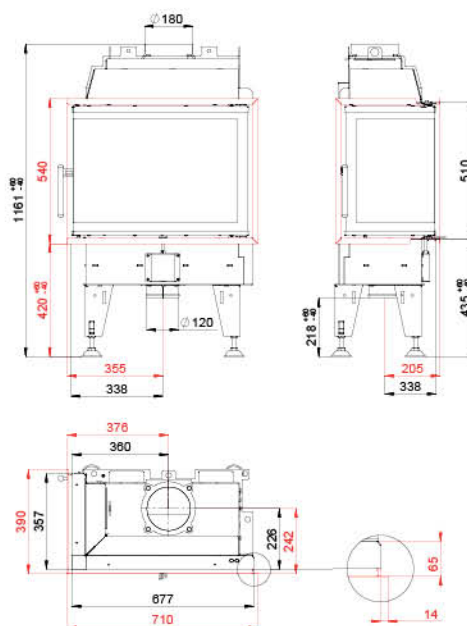

5 - 8 kW 85 % 180 mm 400 mm 515 x 215 mm 650 x 330 x 468 mm

12 Pa 2,54 kg/h 212 °C 6 g/s 0,0932 % 16 mg/Nm³ 129 kg


BEF FEEL V 8

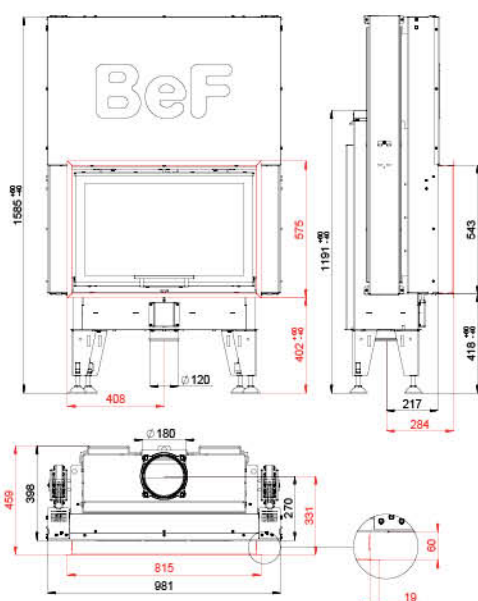BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

5 - 8 kW 85 % 180 mm 500 mm 600 x 220 mm 750 x 468 mm

12 Pa 2,54 kg/h 212 °C 6 g/s 0,0932 % 16 mg/Nm³ 231 kg

BEF FEEL V 8 CL/CP

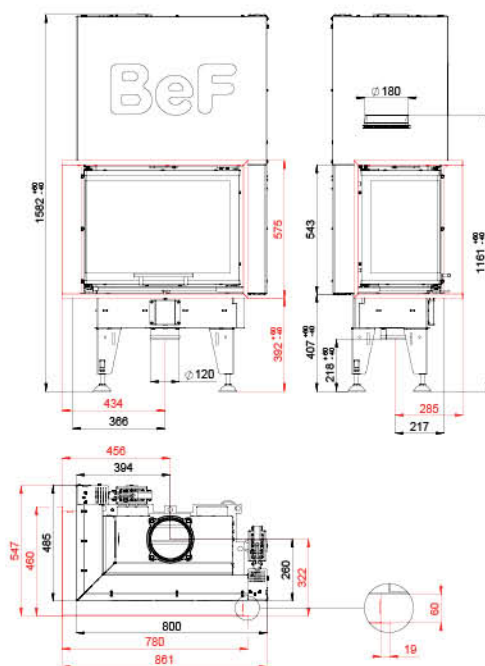
BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

5 - 8 kW 85 % 180 mm 400 mm 515 x 215 mm 650 x 330 x 468 mm

12 Pa 2,54 kg/h 212 °C 6 g/s 0,0932 % 16 mg/Nm³ 215 kg

BEF FLAT 4 L

ČSN EN
13229

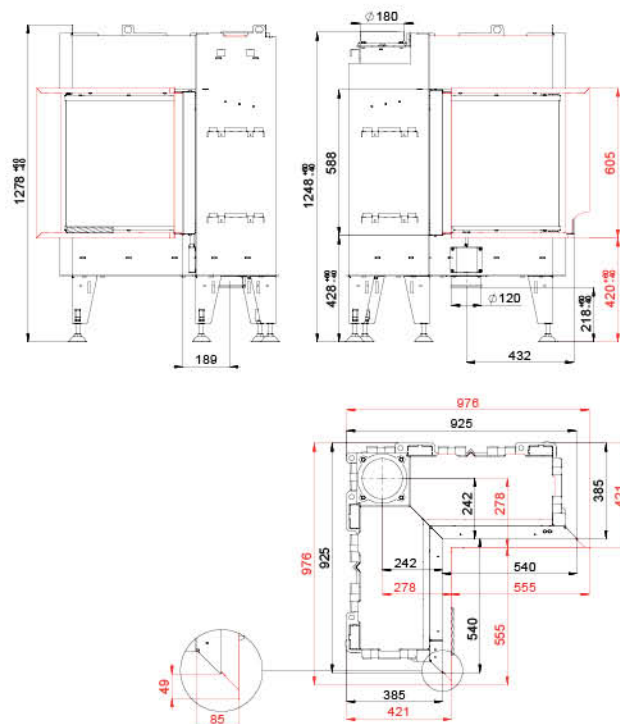

5 - 8 kW 82 % 180 mm 600 mm 707 x 229 mm
707 x 229 mm 480 x 480 x 532 mm 1x

10 Pa 2,22 kg/h 267 °C 9 g/s 0,0673 % 26 mg/Nm³ 262 kg


BEF FLAT V 4 L

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

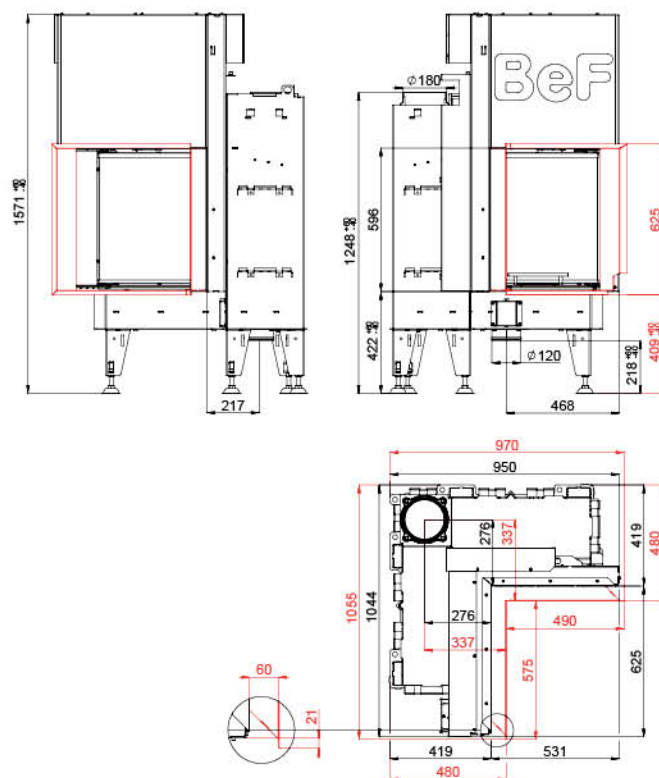



5 - 8 kW 82 % 180 mm 600 mm 707 x 229 mm
707 x 229 mm 480 x 480 x 532 mm 1x

10 Pa 2,22 kg/h 267 °C 9 g/s 0,0673 % 26 mg/Nm³ 351 kg



BEF FLAT 6 L

ČSN EN
13229

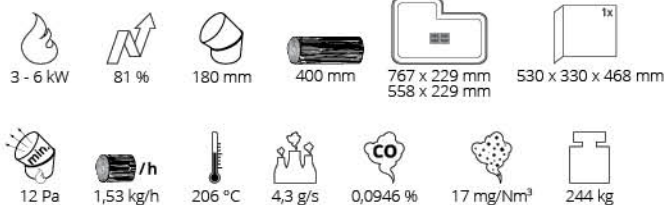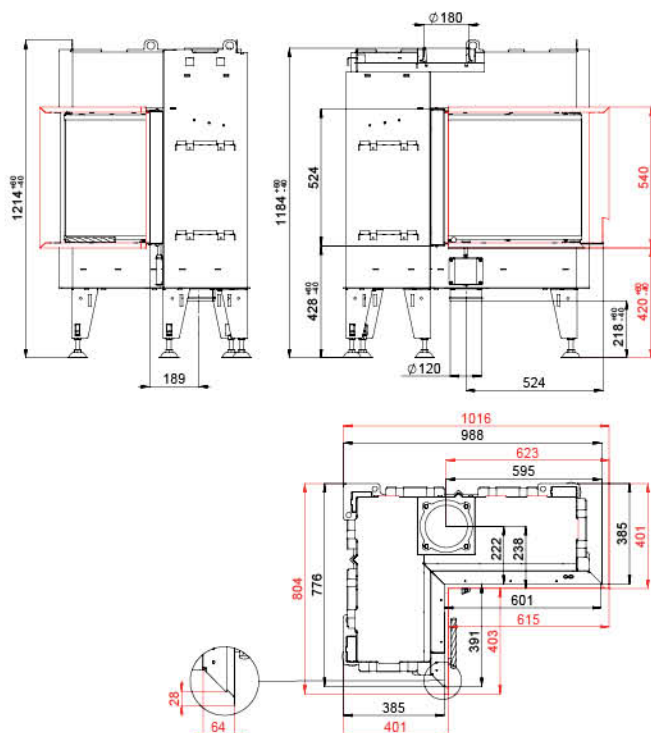



BEF FLAT V 6 L

BlmSchV
Stufe 2



15a
B - VG

ČSN EN
13229


eco
design

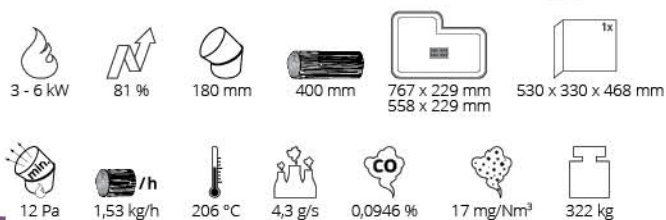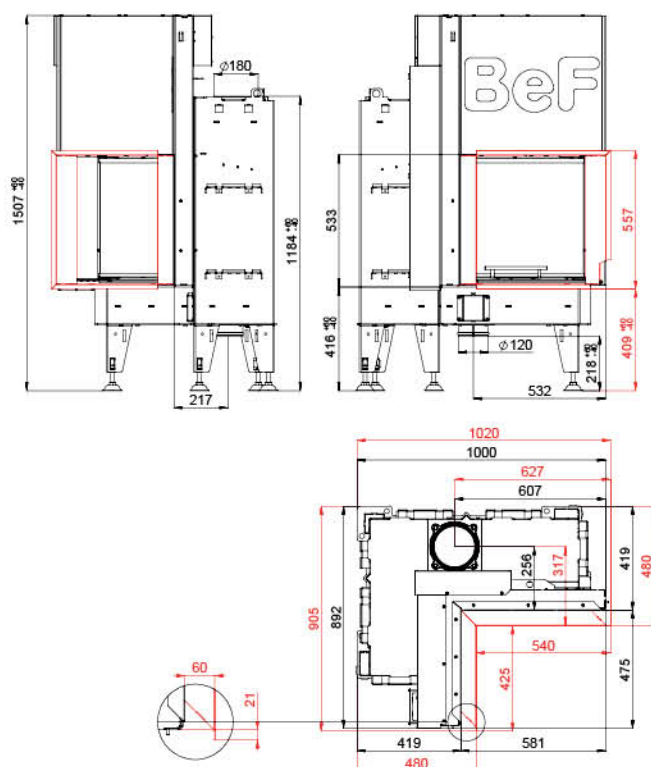


BEF FLAT 8 L

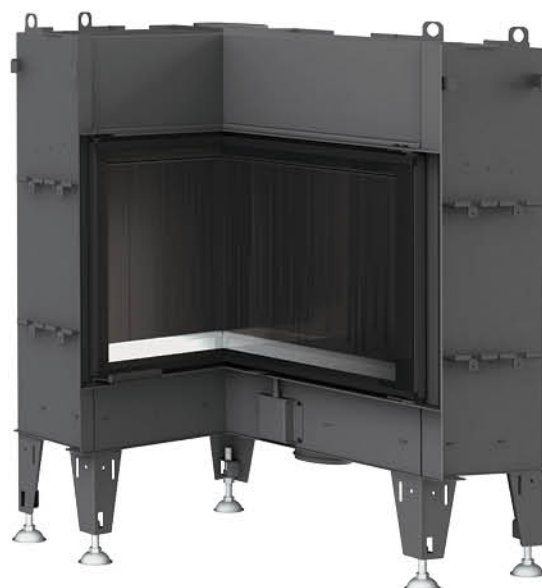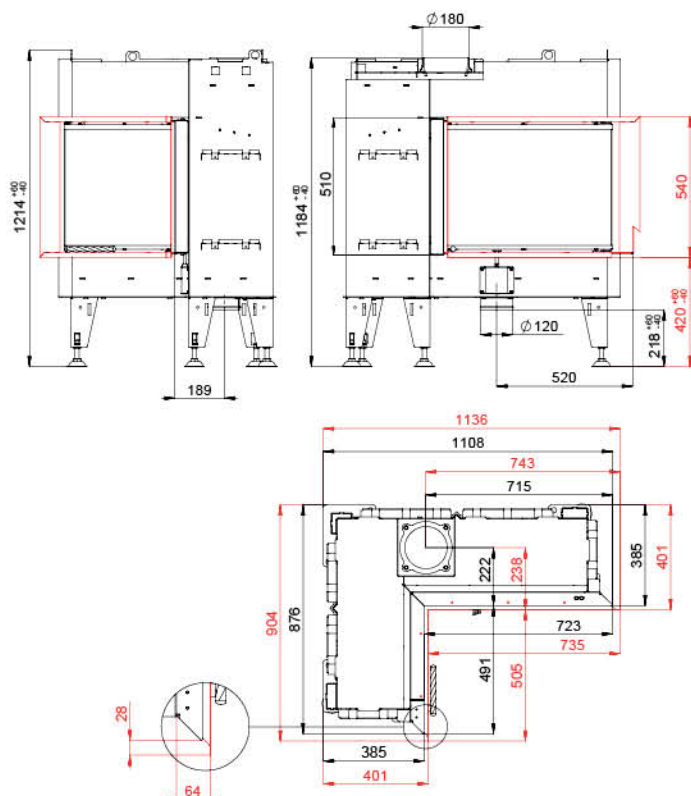

BlmSchV
Stufe 2

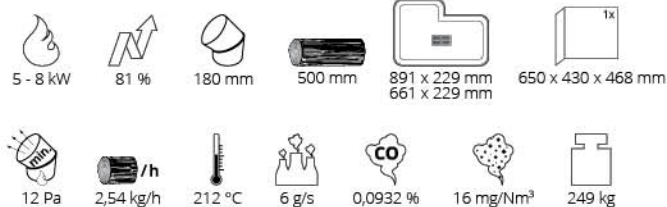

BEF FLAT V 8 L

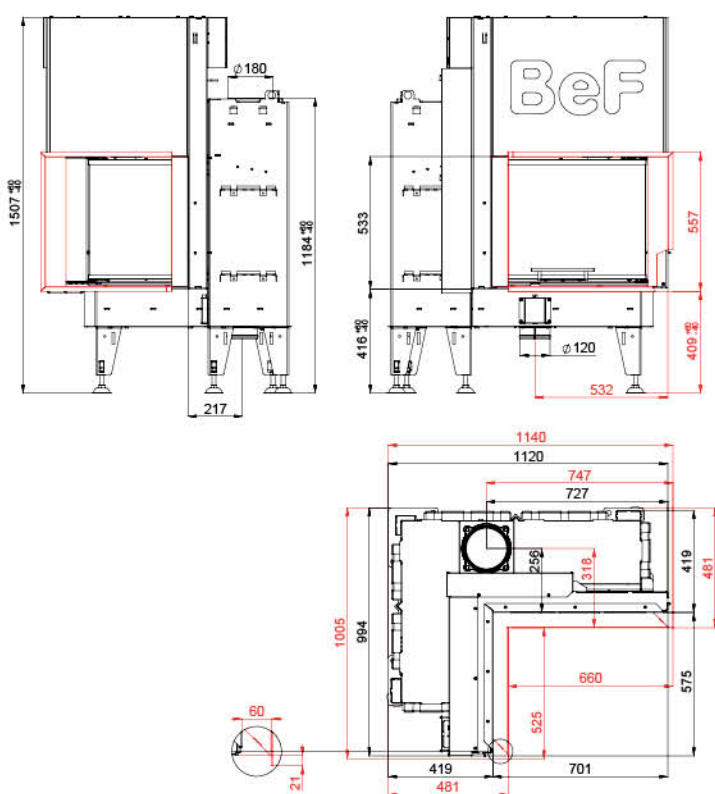


BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design


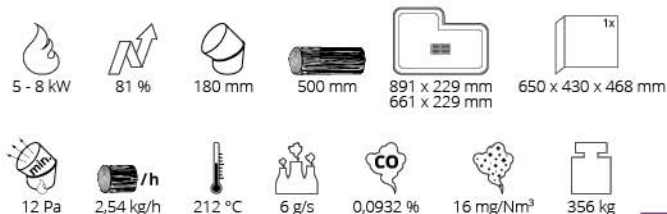




BEF LONG 7


ČSN EN
13229

eco
design

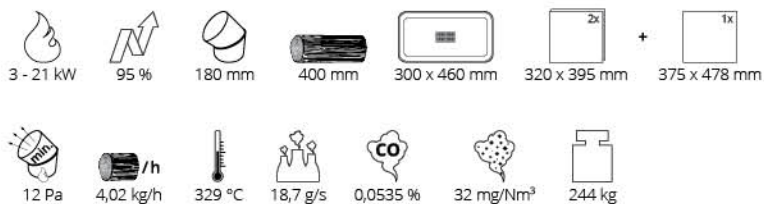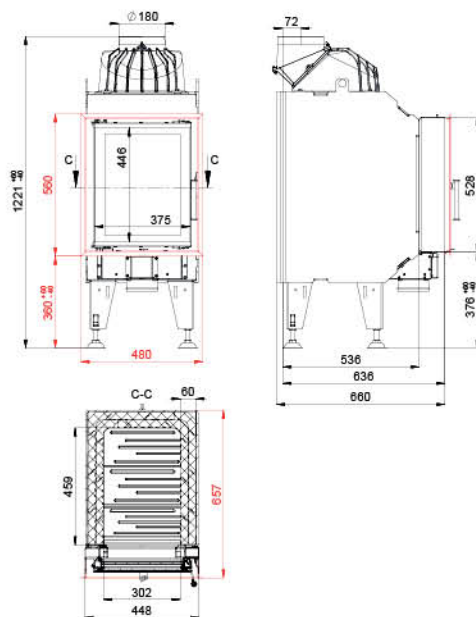



BEF DOUBLE 6 FEEL

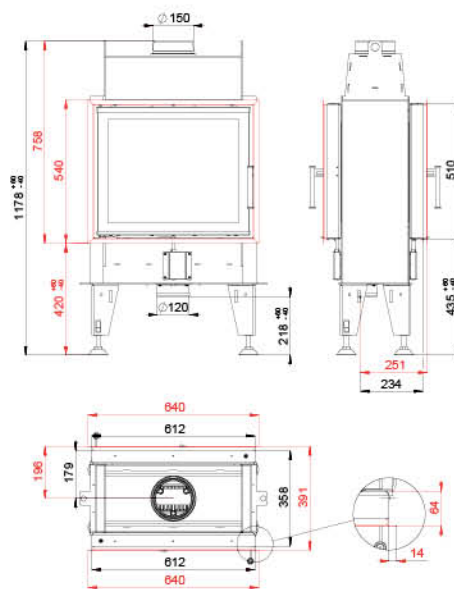BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

3 - 6 kW

84 %

150 mm

330 mm

416 x 210 mm

570 x 468 mm
570 x 468 mm

12 Pa

1,53 kg/h

206 °C


4,3 g/s

0,0946 %

17 mg/Nm³

110 kg

BEF DOUBLE 6 N FEEL

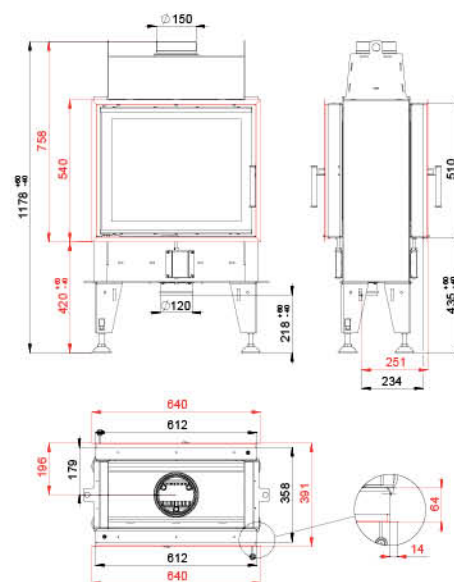BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

3 - 6 kW

84 %

150 mm

330 mm

416 x 210 mm

570 x 468 mm

12 Pa

1,53 kg/h

206 °C


4,3 g/s

0,0946 %

17 mg/Nm³

121 kg

BEF DOUBLE V 6 FEEL

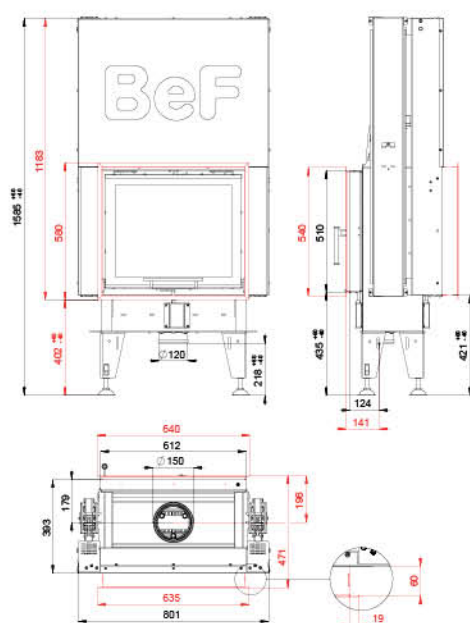

3 - 6 kW
 84 %
 150 mm
 330 mm
 416 x 210 mm
 570 x 468 mm
 570 x 468 mm

12 Pa
 1,53 kg/h
 206 °C
 4,3 g/s
 0,0946 %
 17 mg/Nm³
 194 kg




BImSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

BEF DOUBLE V 6 N FEEL

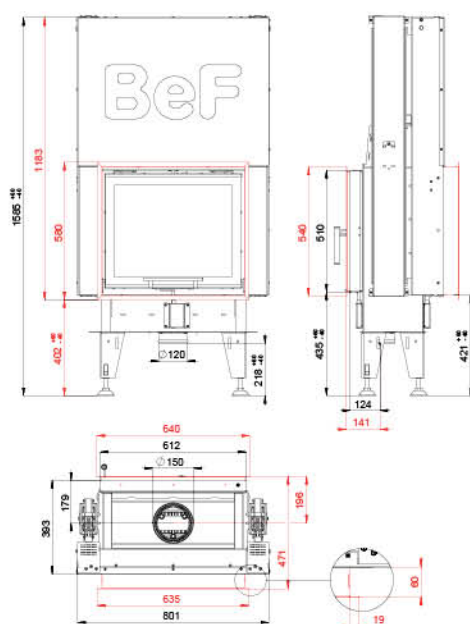

3 - 6 kW
 84 %
 150 mm
 330 mm
 416 x 210 mm
 570 x 468 mm
 570 x 468 mm

12 Pa
 1,53 kg/h
 206 °C
 4,3 g/s
 0,0946 %
 17 mg/Nm³
 196 kg




BImSchV
Stufe 2

15a
B - VG

ČSN EN
13229

eco
design

BEF DOUBLE 7 FEEL

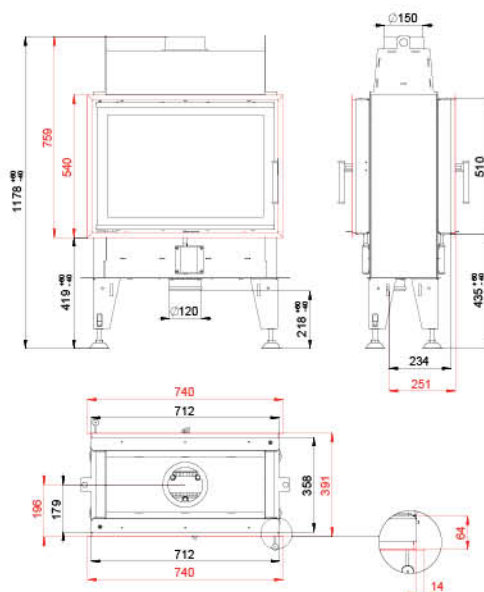BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

4 - 7 kW

82 %

150 mm

400 mm

504 x 210 mm

1x
670 x 468 mm
670 x 468 mm

12 Pa

2,47 kg/h

232 °C


6,5 g/s

0,0811 %

18 mg/Nm³

123 kg

BEF DOUBLE 7 N FEEL

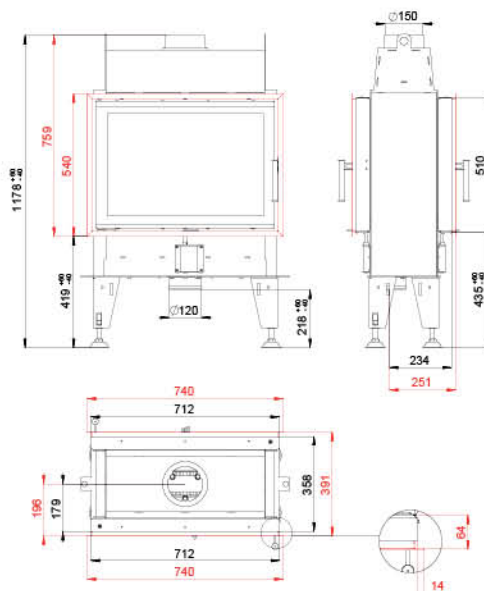BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

4 - 7 kW

82 %

150 mm

400 mm

504 x 210 mm

1x
670 x 468 mm

12 Pa

2,47 kg/h

232 °C


6,5 g/s

0,0811 %


18 mg/Nm³

129 kg



BEF DOUBLE V 7 FEEL

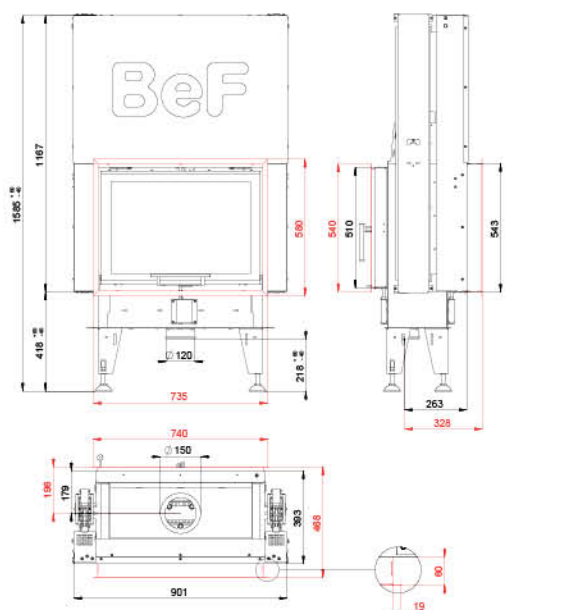BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design



BEF DOUBLE V 7 N FEEL

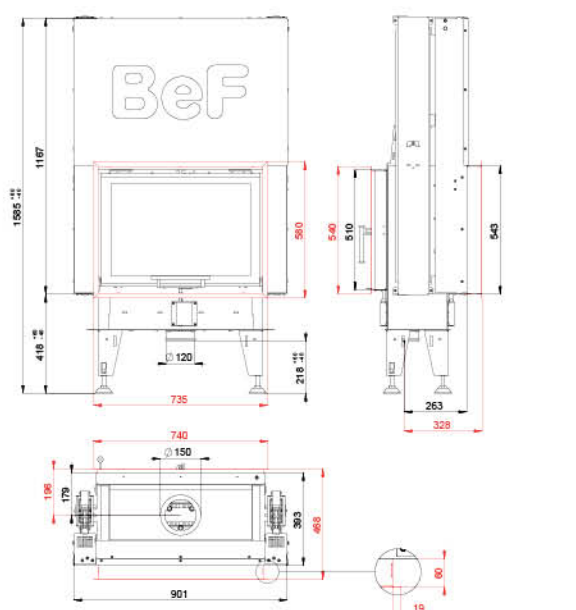BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design



BEF TWIN 7 CL/CP

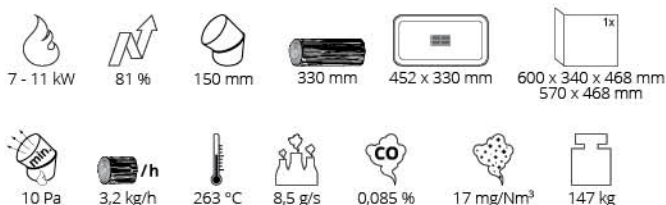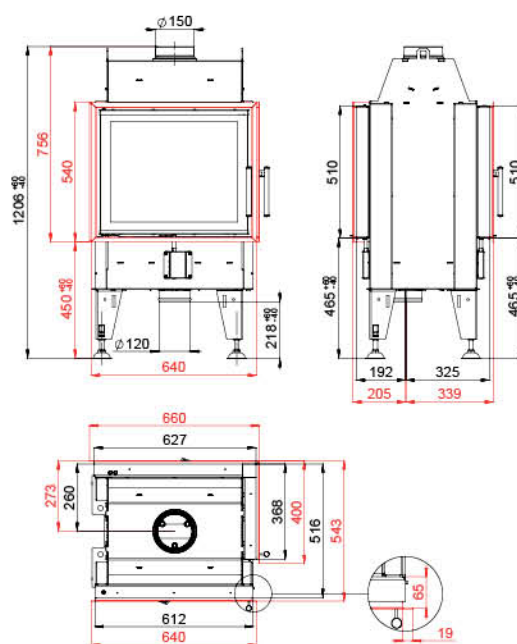BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design


BEF TWIN 7 CL-CL/CP-CP

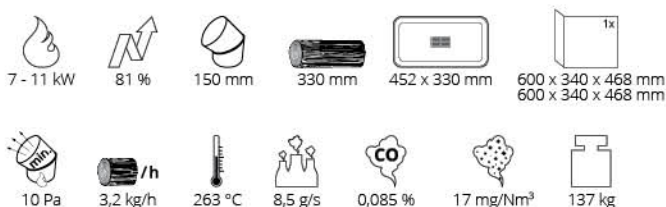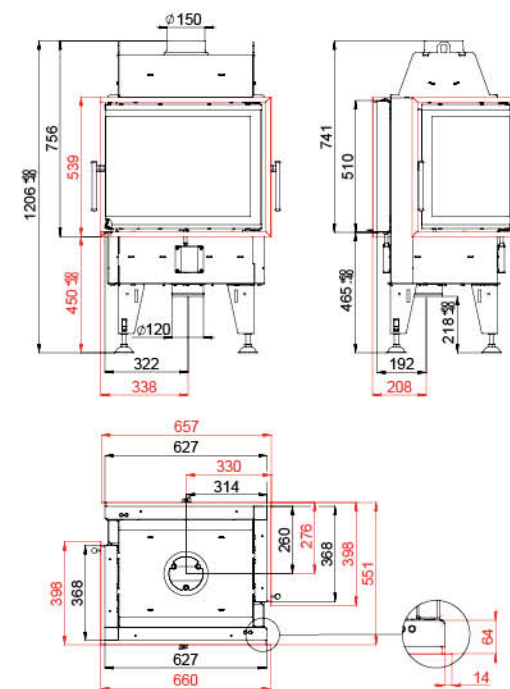BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design



BEF TWIN 7 N CL/CP

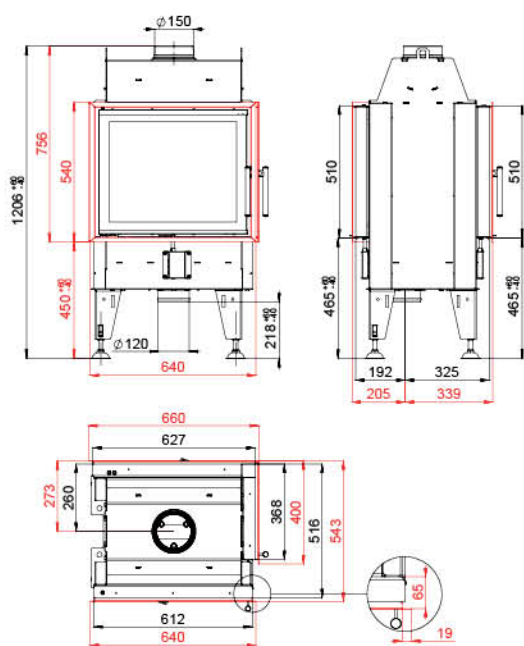BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design



BEF TWIN V 7 CL/CP

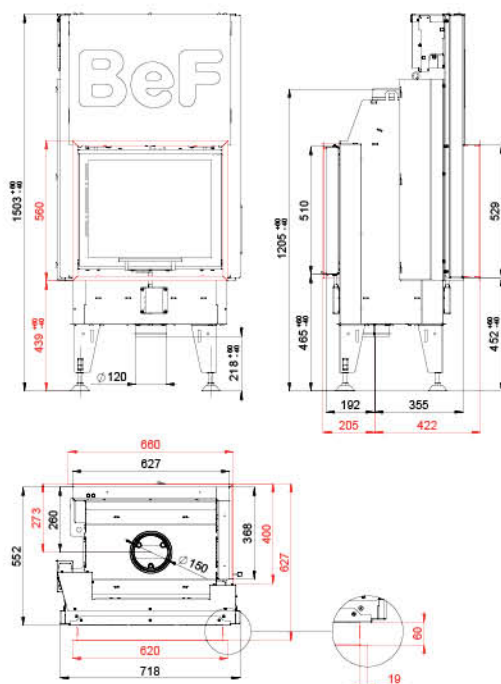BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design



BEF TWIN 8 II.

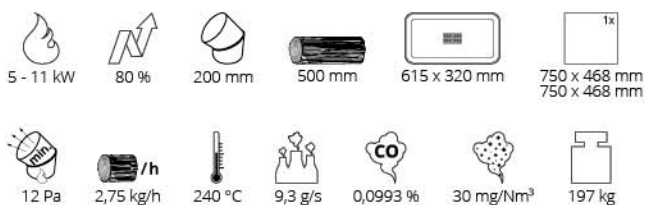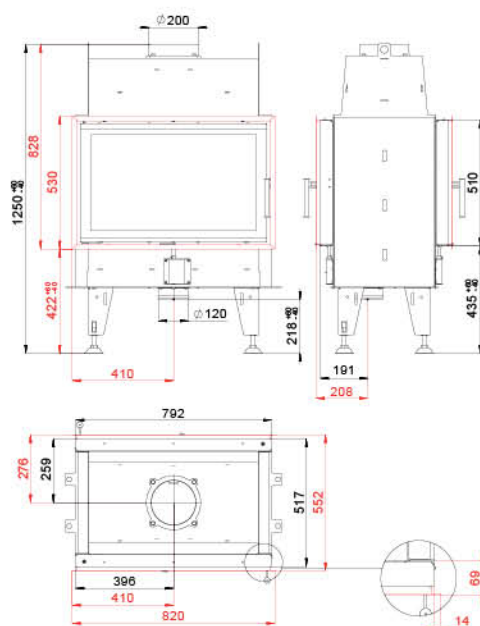BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design




BEF TWIN 8 N II.

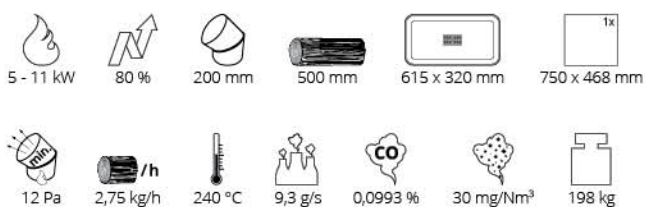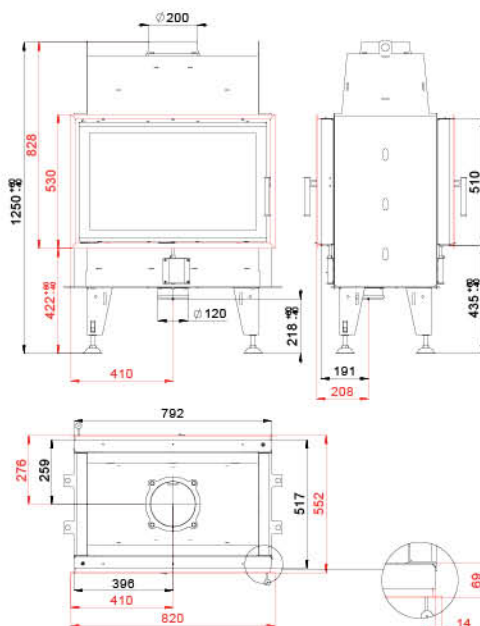BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design




BEF TWIN V 8 II.

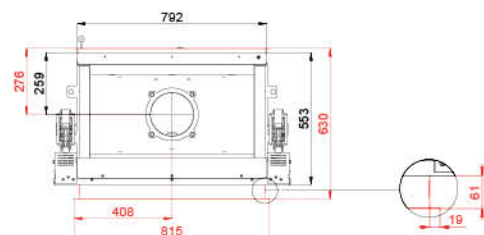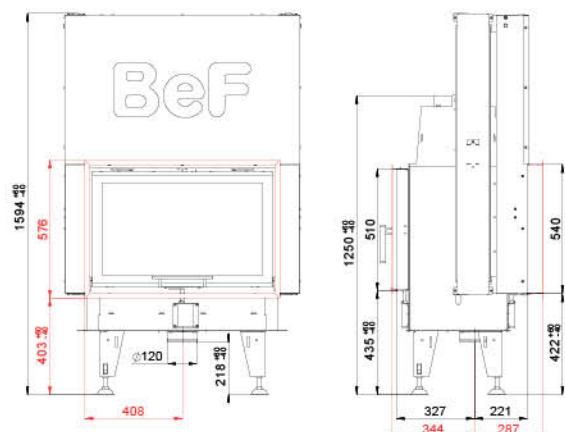BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design




BEF TWIN V 8 N II.

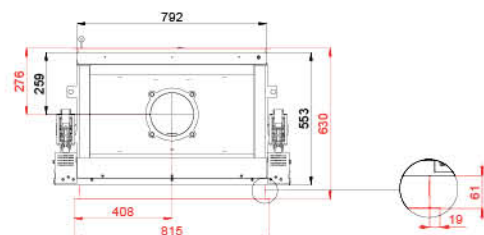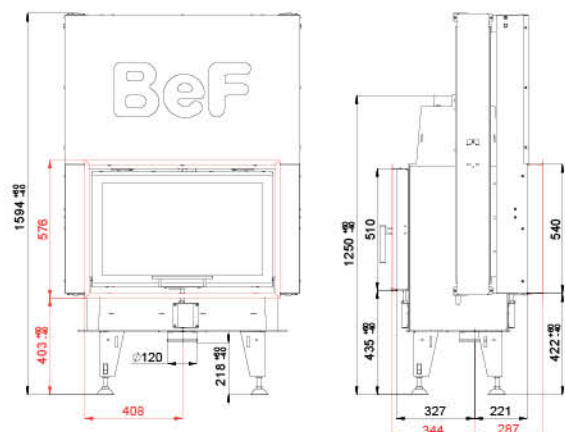BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design



BEF TWIN 10 II.

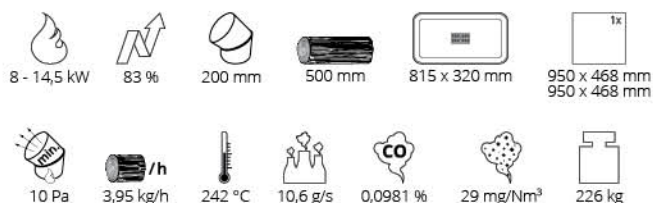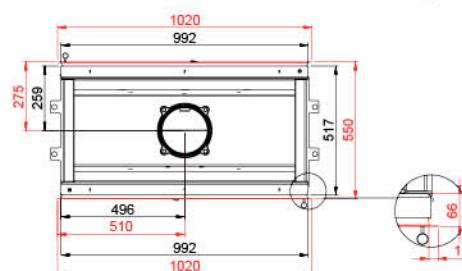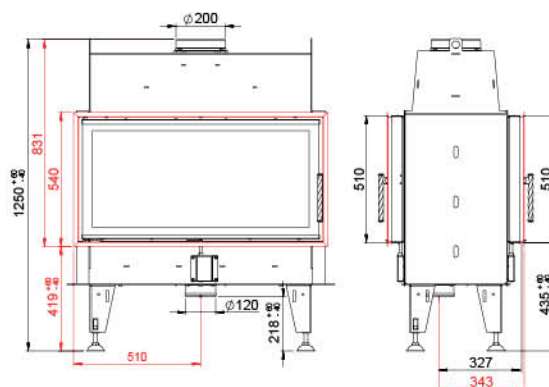BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

BEF TWIN 10 N II.

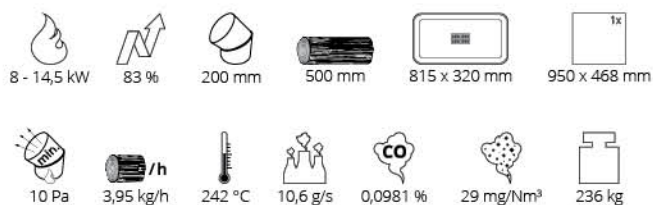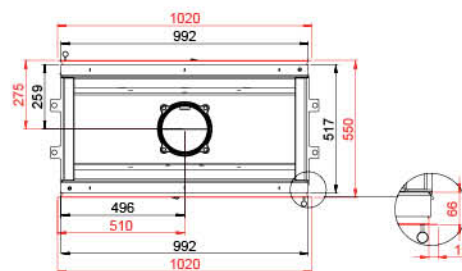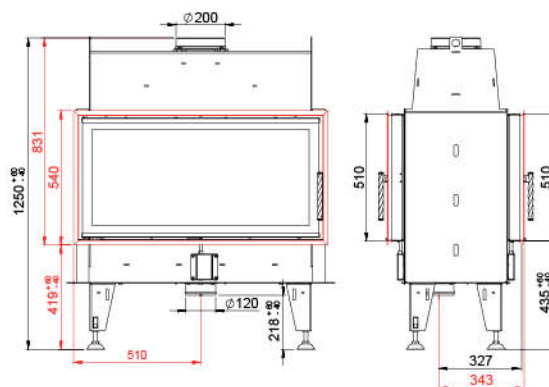BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

BEF TWIN V 10 II.

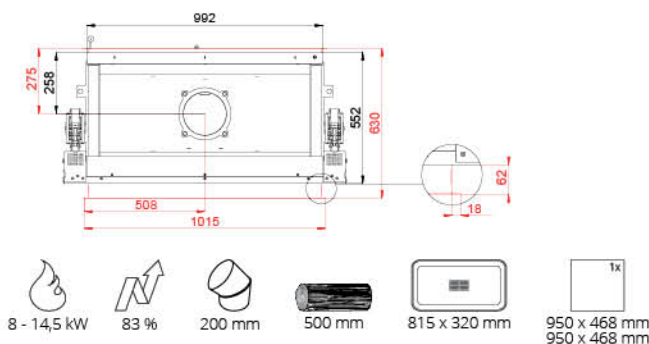
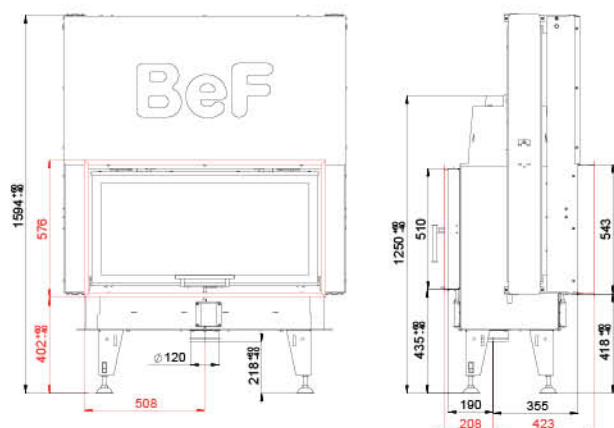
BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

8 - 14,5 kW 83 % 200 mm 500 mm 815 x 320 mm 950 x 468 mm
950 x 468 mm

10 Pa 3,95 kg/h 242 °C 10,6 g/s 0,0981 % 29 mg/Nm³ 307 kg



BEF TWIN V 10 N II.

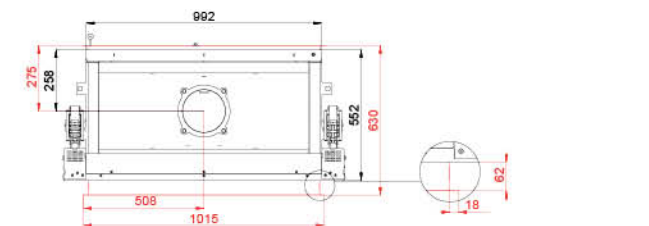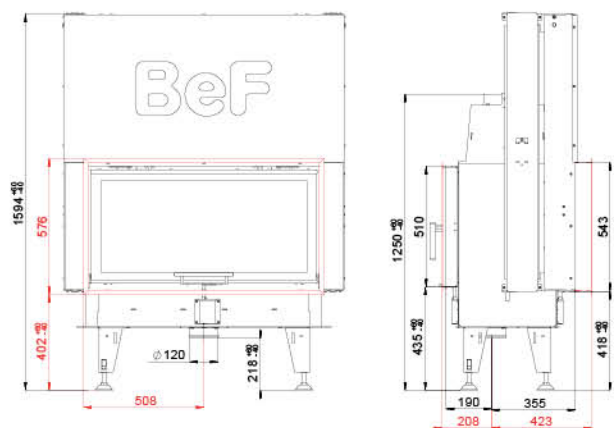BlmSchV
Stufe 215a
B - VGČSN EN
13229eco
design

8 - 14,5 kW 83 % 200 mm 500 mm 815 x 320 mm 950 x 468 mm
950 x 468 mm


10 Pa 3,95 kg/h 242 °C 10,6 g/s 0,0981 % 29 mg/Nm³ 366 kg





BEF EFFI 6 S

ČSN EN
13229

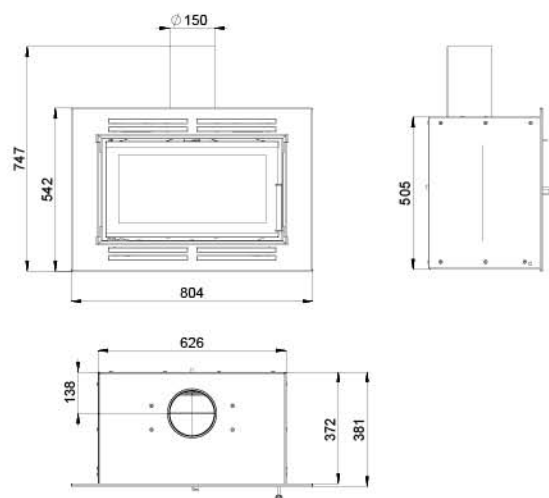

3 - 6 kW

84 %

150 mm

330 mm

410 x 190 mm

570 x 308 mm

12 Pa

1,53 kg/h

206 °C

4,3 g/s

0,0946 %

17 mg/Nm³

97 kg






BEF SPIRIT 7

ČSN EN
13229



White
Pearl Beige
Latte
Mocca
Antracit
Bordeaux
Ferrari
Azzurro

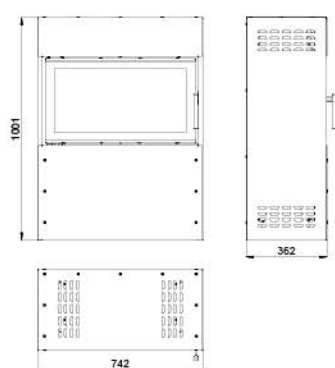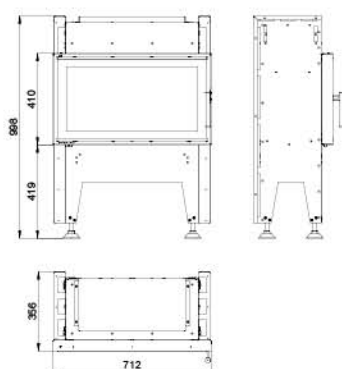

BEF RUSTICAL

16:9

