

Defro Home Intra series

INTRA distinguishes with exceptionally light and timeless form, which ideally incorporates into any residential space. The INTRA line offers straight, corner and three-sided vision of fire and option to select doors opening method: Perfect UP or conventional opening to the side.

Division of the Defro Home Intra series:

1. Air fireplace inserts with straight glass sheet opening to the side:
 - Defro Home Intra XSM
 - Defro Home Intra SM
 - Defro Home Intra ME
 - Defro Home Intra LA
2. Air fireplace inserts with side glass sheet opening to the side:
 - Defro Home Intra XSM BL / BP MINI
 - Defro Home Intra SM BL / BP MINI
 - Defro Home Intra SM BL / BP
 - Defro Home Intra ME BL / BP
3. Air fireplace inserts with straight glass sheet opening upwards:
 - Defro Home Intra SM G
 - Defro Home Intra ME G
 - Defro Home Intra LA G
 - Defro Home Intra XLA G
4. Air fireplace inserts with side glass sheet opening upwards:
 - Defro Home Intra XSM BL / BP MINI G
 - Defro Home Intra SM BL / BP MINI G
 - Defro Home Intra SM BL / BP G
 - Defro Home Intra ME BL / BP G
5. Air inserts with the two-sided vision of fire:
 - Defro Home Intra SM T
 - Defro Home Intra ME T
 - Defro Home Intra LA T
6. Air fireplace inserts with the two-sided vision of fire, opening upwards:
 - Defro Home Intra SM T G
 - Defro Home Intra ME T G
 - Defro Home Intra LA T G
7. Air fireplace inserts with three glass sheets opening to the side:
 - Defro Home Intra XSM C
 - Defro Home Intra SM C
8. Air fireplace inserts with three glass sheets opening upwards:
 - Defro Home Intra XSM C G
 - Defro Home Intra SM C G
 - Defro Home Intra ME C G
9. Air fireplace inserts with three glass sheets opening to the side with modular system Defro Home Intra XSM C ver. COMPACT 1



DEFRO HOME INTRA ME BL



DEFRO HOME INTRA XSM

Defro Home Intra series

1. Air fireplace inserts with straight glass sheet opening to the side





DEFRO HOME INTRA XSM

nominal power	8 kW
power range	3,2-9,6 kW
energy efficiency class	A+
flue size	150 mm
efficiency	80,9 %
flue gas temperature	250°C
the maximum length of chunks	350 mm
minimum air inlet area	400 cm²
minimum air outlet area	560 cm²
weight	~154 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- handle on the other side
- black handle
- Thermoblock accumulation
- double glass

DIMENSIONS IN MM:

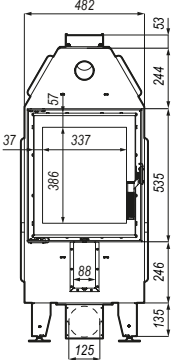



DEFRO HOME INTRA SM

nominal power	10 kW
power range	4-12 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,1 %
flue gas temperature	267°C
the maximum length of chunks	500 mm
minimum air inlet area	500 cm²
minimum air outlet area	700 cm²
weight	~200 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- handle on the other side
- black handle
- Thermoblock accumulation
- double glass

DIMENSIONS IN MM:

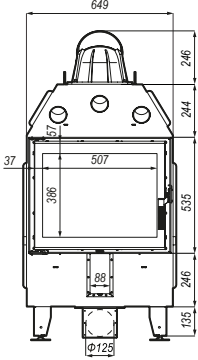



DEFRO HOME INTRA ME

nominal power	13 kW
power range	5,2-15,6 kW
energy efficiency class	A+
flue size	200 mm
efficiency	80 %
flue gas temperature	261°C
the maximum length of chunks	700 mm
minimum air inlet area	650 cm²
minimum air outlet area	910 cm²
weight	~235 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- handle on the other side
- black handle
- Thermoblock accumulation
- double glass

DIMENSIONS IN MM:

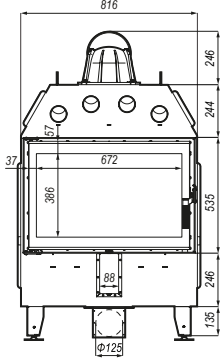



DEFRO HOME INTRA LA

nominal power	16 kW
power range	6,4-19,2 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,1 %
flue gas temperature	269°C
the maximum length of chunks	850 mm
minimum air inlet area	800 cm²
minimum air outlet area	1120 cm²
weight	~268 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- handle on the other side
- black handle
- Thermoblock accumulation
- double glass

DIMENSIONS IN MM:

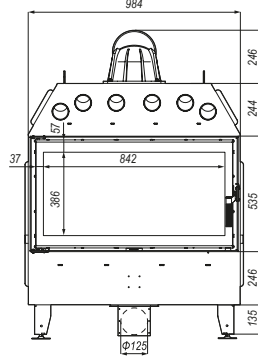



DEFRO HOME INTRA ME BL



DEFRO HOME INTRA SM BP MINI

Defro Home Intra series


2. Air fireplace inserts with side glass sheet opening to the side



DEFRO HOME INTRA XSM BL / BP MINI	
nominal power	8 kW
power range	3,2-9,6 kW
energy efficiency class	A+
flue size	150 mm
efficiency	80,9 %
flue gas temperature	250°C
the maximum length of chunks	350 mm
minimum air inlet area	400 cm²
minimum air outlet area	560 cm²
weight	~134 kg

- ADDITIONAL EQUIPMENT**
- black ceramiton
 - handle on the other side
 - black handle
 - Thermoblock accumulation


DIMENSIONS IN MM:

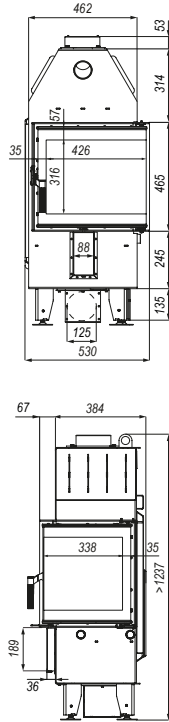

DEFRO HOME INTRA SM BL / BP MINI	
nominal power	10 kW
power range	4-12 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,1 %
flue gas temperature	267°C
the maximum length of chunks	500 mm
minimum air inlet area	500 cm²
minimum air outlet area	700 cm²
weight	~177 kg

- ADDITIONAL EQUIPMENT**
- black ceramiton
 - handle on the other side
 - black handle
 - Thermoblock accumulation


DIMENSIONS IN MM:

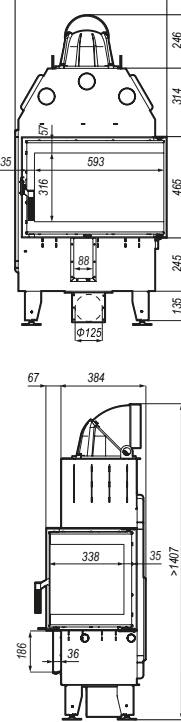

DEFRO HOME INTRA SM BL / BP	
nominal power	10 kW
power range	4-12 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,1 %
flue gas temperature	267°C
the maximum length of chunks	500 mm
minimum air inlet area	500 cm²
minimum air outlet area	700 cm²
weight	~202 kg

- ADDITIONAL EQUIPMENT**
- black ceramiton
 - handle on the other side
 - black handle
 - Thermoblock accumulation


DIMENSIONS IN MM:

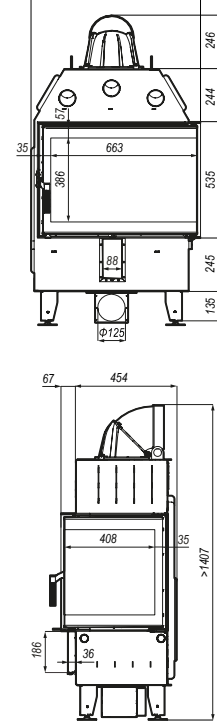

DEFRO HOME INTRA ME BL / BP	
nominal power	13 kW
power range	5,2-15,6 kW
energy efficiency class	A+
flue size	200 mm
efficiency	80 %
flue gas temperature	261°C
the maximum length of chunks	700 mm
minimum air inlet area	650 cm²
minimum air outlet area	910 cm²
weight	~238 kg

- ADDITIONAL EQUIPMENT**
- black ceramiton
 - handle on the other side
 - black handle
 - Thermoblock accumulation

DIMENSIONS IN MM:

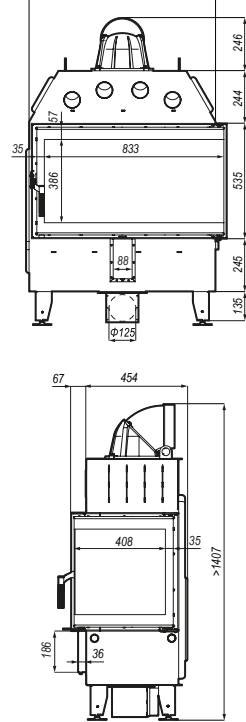

Defro Home Intra series

3. Air fireplace inserts with straight glass sheet opening upwards



DEFRO HOME INTRA SM G




DEFRO HOME INTRA SM G

nominal power	10 kW
power range	4-12 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,1 %
flue gas temperature	267°C
the maximum length of chunks	500 mm
minimum air inlet area	500 cm²
minimum air outlet area	700 cm²
weight	~245 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- removable handle for guillotines
- black handle
- Thermoblock accumulation
- double glass

DIMENSIONS IN MM:

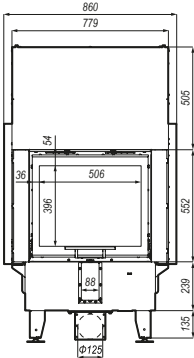


DEFRO HOME INTRA ME G

nominal power	13 kW
power range	5,2-15,6 kW
energy efficiency class	A+
flue size	200 mm
efficiency	80 %
flue gas temperature	261°C
the maximum length of chunks	700 mm
minimum air inlet area	650 cm²
minimum air outlet area	910 cm²
weight	~281 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- removable handle for guillotines
- black handle
- Thermoblock accumulation
- double glass

DIMENSIONS IN MM:

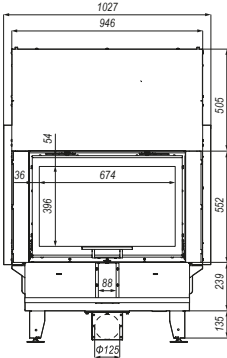


DEFRO HOME INTRA LA G

nominal power	16 kW
power range	6,4-19,2 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,1 %
flue gas temperature	269°C
the maximum length of chunks	850 mm
minimum air inlet area	800 cm²
minimum air outlet area	1120 cm²
weight	~318 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- removable handle for guillotines
- black handle
- Thermoblock accumulation
- double glass

DIMENSIONS IN MM:

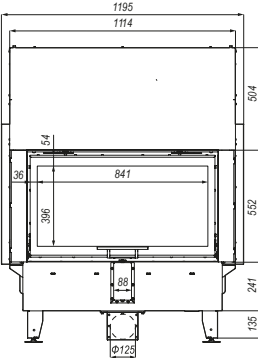



DEFRO HOME INTRA XLA G

nominal power	22 kW
power range	8,8-26,4 kW
energy efficiency class	A
flue size	250 mm
efficiency	80 %
flue gas temperature	258°C
the maximum length of chunks	850 mm
minimum air inlet area	1100 cm²
minimum air outlet area	1540 cm²
weight	~420 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- removable handle for guillotines
- black handle
- Thermoblock accumulation
- double glass

DIMENSIONS IN MM:

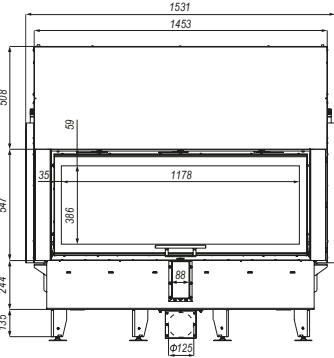

Defro Home Intra series

4. Air fireplace inserts with side glass sheet opening upwards



DEFRO HOME INTRA XSM BP MINI G





DEFRO HOME INTRA XSM BL / BP MINI G	
nominal power	8 kW
power range	3,2-9,6 kW
energy efficiency class	A+
flue size	150 mm
efficiency	80,9 %
flue gas temperature	250°C
the maximum length of chunks	350 mm
minimum air inlet area	400 cm²
minimum air outlet area	560 cm²
weight	-195 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- removable handle for guillotines
- black handle

DIMENSIONS IN MM:


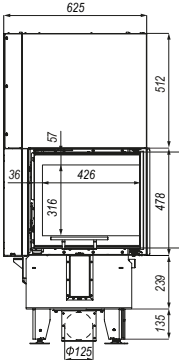


DEFRO HOME INTRA SM BL / BP MINI G	
nominal power	10 kW
power range	4-12 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,1 %
flue gas temperature	267°C
the maximum length of chunks	500 mm
minimum air inlet area	500 cm²
minimum air outlet area	700 cm²
weight	-235 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- removable handle for guillotines
- black handle
- Thermoblock accumulation

DIMENSIONS IN MM:


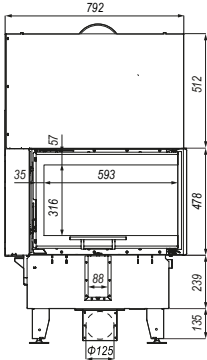


DEFRO HOME INTRA SM BL / BP G	
nominal power	10 kW
power range	4-12 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,1 %
flue gas temperature	267°C
the maximum length of chunks	500 mm
minimum air inlet area	500 cm²
minimum air outlet area	700 cm²
weight	-264 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- removable handle for guillotines
- black handle
- Thermoblock accumulation

DIMENSIONS IN MM:


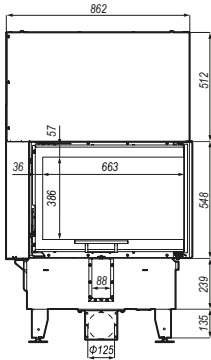


DEFRO HOME INTRA ME BL / BP G	
nominal power	13 kW
power range	5,2-15,6 kW
energy efficiency class	A+
flue size	200 mm
efficiency	80 %
flue gas temperature	261°C
the maximum length of chunks	700 mm
minimum air inlet area	650 cm²
minimum air outlet area	910 cm²
weight	-306 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- removable handle for guillotines
- black handle
- Thermoblock accumulation

DIMENSIONS IN MM:

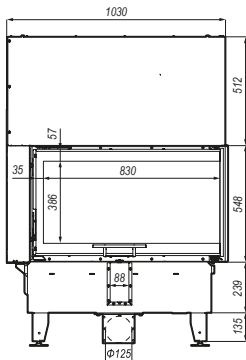

Defro Home Intra series

5. Air inserts with the two-sided vision of fire



DEFRO HOME INTRA LA T





DEFRO HOME INTRA SM T

nominal power	10 kW
power range	4-12 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,1 %
flue gas temperature	267°C
the maximum length of chunks	500 mm
minimum air inlet area	500 cm²
minimum air outlet area	700 cm²
weight	~230 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- handle on the other side
- black handle
- Thermoblock accumulation
- double glass

DIMENSIONS IN MM:






DEFRO HOME INTRA ME T

nominal power	13 kW
power range	5,2-15,6 kW
energy efficiency class	A+
flue size	200 mm
efficiency	80 %
flue gas temperature	261°C
the maximum length of chunks	700 mm
minimum air inlet area	650 cm²
minimum air outlet area	910 cm²
weight	~240 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- handle on the other side
- black handle
- Thermoblock accumulation
- double glass

DIMENSIONS IN MM:

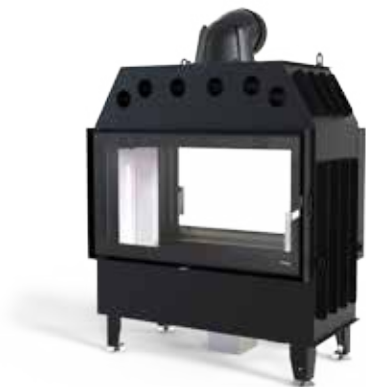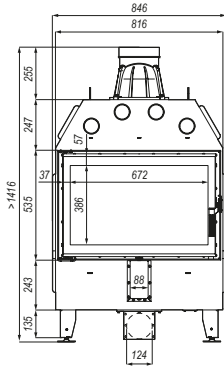



DEFRO HOME INTRA LA T

nominal power	16 kW
power range	6,4-19,2 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,1 %
flue gas temperature	269°C
the maximum length of chunks	850 mm
minimum air inlet area	800 cm²
minimum air outlet area	1120 cm²
weight	~277 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- handle on the other side
- black handle
- Thermoblock accumulation
- double glass

DIMENSIONS IN MM:





DEFRO HOME INTRA ME T G

Defro Home Intra series

6. Air fireplace inserts with the two-sided vision of fire, opening upwards





DEFRO HOME INTRA SM T G

nominal power	10 kW
power range	4-12 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,1 %
flue gas temperature	267°C
the maximum length of chunks	500 mm
minimum air inlet area	500 cm²
minimum air outlet area	700 cm²
weight	-250 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- removable handle for guillotines
- black handle
- double glass

DIMENSIONS IN MM:





DEFRO HOME INTRA ME T G

nominal power	13 kW
power range	5,2-15,6 kW
energy efficiency class	A+
flue size	200 mm
efficiency	80 %
flue gas temperature	261°C
the maximum length of chunks	700 mm
minimum air inlet area	650 cm²
minimum air outlet area	910 cm²
weight	-290 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- removable handle for guillotines
- black handle
- double glass

DIMENSIONS IN MM:





DEFRO HOME INTRA LA T G

nominal power	16 kW
power range	6,4-19,2 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,1 %
flue gas temperature	269°C
the maximum length of chunks	850 mm
minimum air inlet area	800 cm²
minimum air outlet area	1120 cm²
weight	-330 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- removable handle for guillotines
- black handle
- double glass

DIMENSIONS IN MM:





DEFRO HOME INTRA XSM C

DEFRO HOME INTRA XSM C



nominal power
power range
energy efficiency class
flue size
efficiency
flue gas temperature
the maximum length of chunks
minimum air inlet area
minimum air outlet area
weight

8 kW
3,2-9,6 kW
A+
150 mm
80,9 %
250 °C
350 mm
400 cm²
560 cm²
~140 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- handle on the other side

DIMENSIONS IN MM:

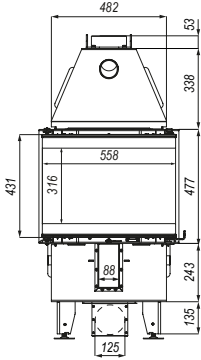

Defro Home Intra series

7. Air fireplace inserts with three glass sheets opening to the side



DEFRO HOME INTRA SM C



nominal power
power range
energy efficiency class
flue size
efficiency
flue gas temperature
the maximum length of chunks
minimum air inlet area
minimum air outlet area
weight

10 kW
4-12 kW
A
200 mm
80,1 %
267 °C
500 mm
500 cm²
700 cm²
~172 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- Thermoblock accumulation
- handle on the other side

DIMENSIONS IN MM:

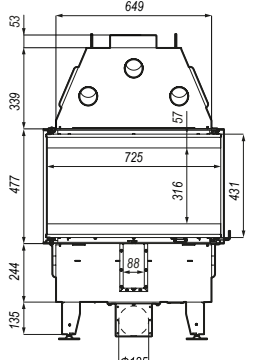

DEFRO HOME INTRA SM C



DEFRO HOME INTRA XSM C G



DEFRO HOME INTRA ME C G

Defro Home Intra series

8. Air fireplace inserts with three glass sheets opening upwards




DEFRO HOME INTRA XSM C G

nominal power	8 kW
power range	3,2-9,6 kW
energy efficiency class	A+
flue size	150 mm
efficiency	80,9 %
flue gas temperature	250°C
the maximum length of chunks	350 mm
minimum air inlet area	400 cm²
minimum air outlet area	560 cm²
weight	~240 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- removable handle for guillotines
- black handle

DIMENSIONS IN MM:

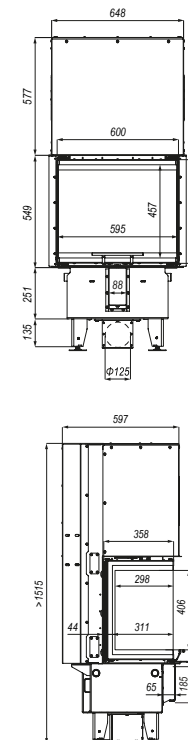


DEFRO HOME INTRA SM C G

nominal power	10 kW
power range	4-12 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,1 %
flue gas temperature	267°C
the maximum length of chunks	500 mm
minimum air inlet area	500 cm²
minimum air outlet area	700 cm²
weight	~280 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- removable handle for guillotines
- black handle

DIMENSIONS IN MM:

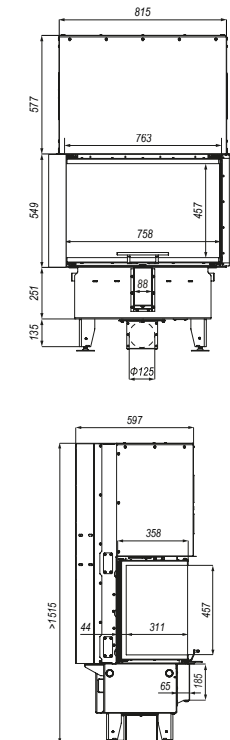


DEFRO HOME INTRA ME C G

nominal power	13 kW
power range	5,2-15,6 kW
energy efficiency class	A+
flue size	200 mm
efficiency	80 %
flue gas temperature	261°C
the maximum length of chunks	700 mm
minimum air inlet area	650 cm²
minimum air outlet area	910 cm²
weight	~320 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- removable handle for guillotines
- black handle

DIMENSIONS IN MM:

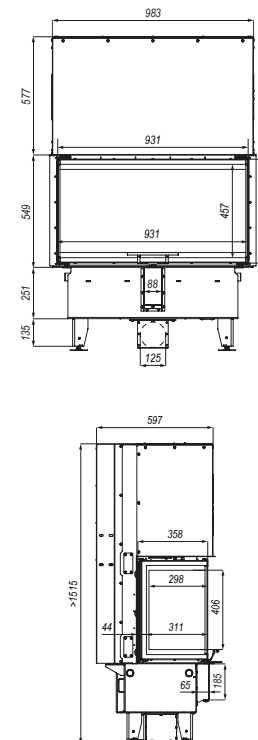



DEFRO HOME INTRA XSM C VER. COMPACT 1

Defro Home Intra series

9. Air fireplace inserts with three glass sheets opening to the side with modular system




DEFRO HOME INTRA XSM C VER. COMPACT 1	
nominal power	8 kW
power range	3,2-9,6 kW
energy efficiency class	A+
flue size	150 mm
efficiency	80,9 %
flue gas temperature	250°C
the maximum length of chunks	350 mm
weight	~230 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- handle on the other side
- colour (red, white, gold, brown, gray)

DIMENSIONS IN MM.

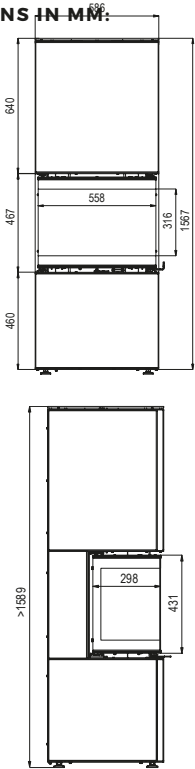

Defro Home Intra Slim series

INTRA SLIM is a series of fireplace inserts adapted for shallow development and homes with smaller total internal volumes. The fireplaces are dedicated to small living rooms where every centimetre of the housing is of significance. The line distinguishes with smaller powers of the fireplaces with straight and side glazing.

The series is available in two versions, depending on the size of the furnace: SM and ME.

Division of the Defro Home Intra Slim series:

1. Air fireplace inserts with straight glass sheet opening to the side:
 - Defro Home Intra SM SLIM
 - Defro Home Intra ME SLIM
2. Air fireplace inserts with side glass sheet opening to the side:
 - Defro Home Intra SM BL/BP SLIM
 - Defro Home Intra ME BL/BP SLIM
3. Air fireplace inserts with straight glass sheet opening upwards:
 - Defro Home Intra SM SLIM G
 - Defro Home Intra ME SLIM G
4. Air fireplace inserts with side glass sheet opening upwards:
 - Defro Home Intra SM BL/BP SLIM G
 - Defro Home Intra ME BL/BP SLIM G



DEFRO HOME INTRA ME BL SLIM



DEFRO HOME INTRA ME SLIM

Defro Home Intra Slim series

1. Air fireplace inserts with straight glass sheet opening to the side



DEFRO HOME INTRA SM SLIM



nominal power
power range
energy efficiency class
flue size
efficiency
flue gas temperature
the maximum length of chunks
minimum air inlet area
minimum air outlet area
weight

6 kW
2,4-7,2 kW
A+
200 mm
82,7 %
224°C
500 mm
300 cm²
420 cm²
~156 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- black handle
- Thermoblock accumulation
- handle on the other side
- double glass

DIMENSIONS IN MM:

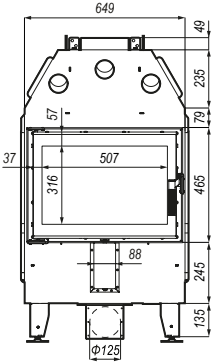

DEFRO HOME INTRA ME SLIM



nominal power
power range
energy efficiency class
flue size
efficiency
flue gas temperature
the maximum length of chunks
minimum air inlet area
minimum air outlet area
weight

8 kW
3,2-9,6 kW
A
200 mm
80,1 %
266°C
700 mm
400 cm²
560 cm²
~181 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- black handle
- Thermoblock accumulation
- handle on the other side
- double glass

DIMENSIONS IN MM:

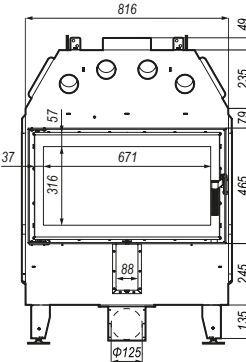



DEFRO HOME INTRA SM BP SLIM

Defro Home Intra Slim series

2. Air fireplace inserts with side glass sheet opening to the side



DEFRO HOME INTRA SM BL/BP SLIM



nominal power
power range
energy efficiency class
flue size
efficiency
flue gas temperature
the maximum length of chunks
minimum air inlet area
minimum air outlet area
weight

6 kW
2,4-7,2 kW
A+
200 mm
82,7 %
224 °C
500 mm
300 cm²
420 cm²
~148 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- handle on the other side
- black handle
- Thermoblock accumulation

DIMENSIONS IN MM:

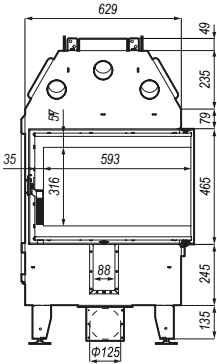

DEFRO HOME INTRA ME BL/BP SLIM



nominal power
power range
energy efficiency class
flue size
efficiency
flue gas temperature
the maximum length of chunks
minimum air inlet area
minimum air outlet area
weight

8 kW
3,2-9,6 kW
A
200 mm
80,1 %
266 °C
700 mm
400 cm²
560 cm²
~178 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- handle on the other side
- black handle
- Thermoblock accumulation

DIMENSIONS IN MM:

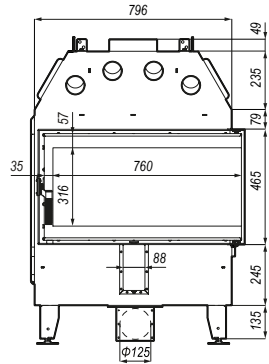



DEFRO HOME INTRA SM SLIM G

Defro Home Intra Slim series

3. Air fireplace inserts with straight glass sheet opening upwards



DEFRO HOME INTRA SM SLIM G


nominal power
power range
energy efficiency class
flue size
efficiency
flue gas temperature
the maximum length of chunks
minimum air inlet area
minimum air outlet area
weight

6 kW
2,4-7,2 kW
A+
200 mm
82,7 %
224°C
500 mm
300 cm²
420 cm²
-209 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- black handle
- Thermoblock accumulation
- removable handle for guillotines
- double glass

DIMENSIONS IN MM:

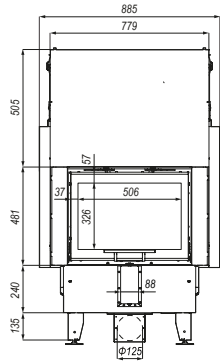

DEFRO HOME INTRA ME SLIM G


nominal power
power range
energy efficiency class
flue size
efficiency
flue gas temperature
the maximum length of chunks
minimum air inlet area
minimum air outlet area
weight

8 kW
3,2-9,6 kW
A
200 mm
80,1 %
266°C
700 mm
400 cm²
560 cm²
-240 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- black handle
- Thermoblock accumulation
- removable handle for guillotines
- double glass

DIMENSIONS IN MM:

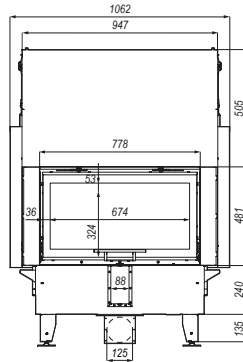

Defro Home Intra Slim series

4. Air fireplace inserts with side glass sheet opening upwards



DEFRO HOME INTRA ME BL SLIM G





DEFRO HOME INTRA SM BL/BP SLIM G

nominal power	6 kW
power range	2,4-7,2 kW
energy efficiency class	A+
flue size	200 mm
efficiency	82,7 %
flue gas temperature	224°C
the maximum length of chunks	500 mm
minimum air inlet area	300 cm²
minimum air outlet area	420 cm²
weight	-214 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- black handle
- Thermoblock accumulation
- removable handle for guillotines

DIMENSIONS IN MM:

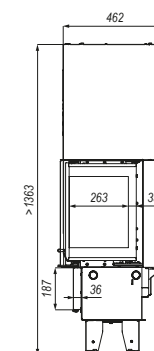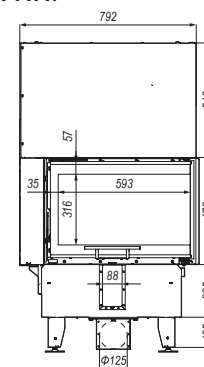



DEFRO HOME INTRA ME BL/BP SLIM G

nominal power	8 kW
power range	3,2-9,6 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,1 %
flue gas temperature	266°C
the maximum length of chunks	700 mm
minimum air inlet area	400 cm²
minimum air outlet area	560 cm²
weight	-250 kg

ADDITIONAL EQUIPMENT

- black ceramiton
- black handle
- Thermoblock accumulation
- removable handle for guillotines

DIMENSIONS IN MM:

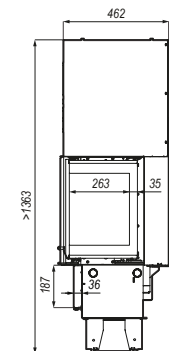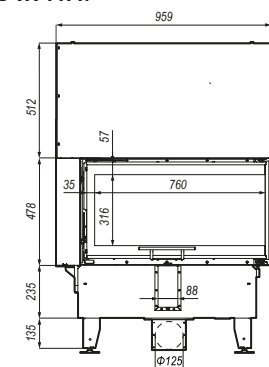

Defro Home Impuls series

IMPULS is an economic alternative offered by DEFRO HOME. Series of IMPULS inserts contains economical solution maintaining the effectiveness of combustion and ecology with DEFRO quality warranty.

The series is available in two versions, depending on the size of the furnace: SM and ME.

Division of the Defro Home Impuls series:

1. Air fireplace inserts with straight glass sheet opening to the side or upwards:

- Defro Home Impuls SM
- Defro Home Impuls SM G
- Defro Home Impuls ME
- Defro Home Impuls ME G

2. Air fireplace inserts with side glass sheet opening to the side or upwards:

- Defro Home Impuls SM BL/BP
- Defro Home Impuls SM BL/BP G
- Defro Home Impuls ME BL/BP
- Defro Home Impuls ME BL/BP G



DEFRO HOME IMPULS SM BP



DEFRO HOME IMPULS SM

Defro Home Impuls series

1. Air fireplace inserts with straight glass sheet opening to the side or upwards





DEFRO HOME IMPULS SM

nominal power	8 kW
power range	3,2-9,6 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,2 %
flue gas temperature	282°C
the maximum length of chunks	500 mm
minimum air inlet area	400 cm²
minimum air outlet area	560 cm²
weight	-170 kg

ADDITIONAL EQUIPMENT

- blackline screen printing
- handle on the other side

DIMENSIONS IN MM:

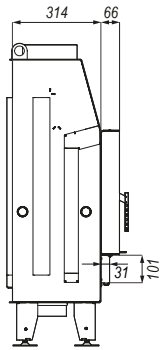



DEFRO HOME IMPULS SM G

nominal power	8 kW
power range	3,2-9,6 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,2 %
flue gas temperature	282°C
the maximum length of chunks	500 mm
minimum air inlet area	400 cm²
minimum air outlet area	560 cm²
weight	-215 kg

ADDITIONAL EQUIPMENT

- blackline screen printing
- removable handle for guillotines

DIMENSIONS IN MM:

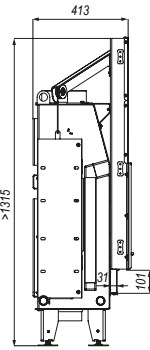



DEFRO HOME IMPULS ME

nominal power	10 kW
power range	4-12 kW
energy efficiency class	A+
flue size	200 mm
efficiency	83,8 %
flue gas temperature	224°C
the maximum length of chunks	700 mm
minimum air inlet area	500 cm²
minimum air outlet area	700 cm²
weight	-188 kg

ADDITIONAL EQUIPMENT

- blackline screen printing
- handle on the other side

DIMENSIONS IN MM:

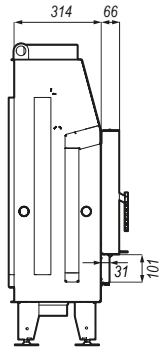



DEFRO HOME IMPULS ME G

nominal power	10 kW
power range	4-12 kW
energy efficiency class	A+
flue size	200 mm
efficiency	83,8 %
flue gas temperature	224°C
the maximum length of chunks	700 mm
minimum air inlet area	500 cm²
minimum air outlet area	700 cm²
weight	-242kg

ADDITIONAL EQUIPMENT

- blackline screen printing
- removable handle for guillotines

DIMENSIONS IN MM:

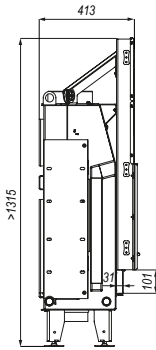



DEFRO HOME IMPULS ME BL

Defro Home Impuls series


2. Air fireplace inserts with side glass sheet opening to the side or upwards



DEFRO HOME IMPULS SM BL/BP	
nominal power	8 kW
power range	3,2-9,6 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,2 %
flue gas temperature	282°C
the maximum length of chunks	500 mm
minimum air inlet area	400 cm²
minimum air outlet area	560 cm²
weight	~143 kg

- ADDITIONAL EQUIPMENT**
- blackline screen printing
 - handle on the other side


DIMENSIONS IN MM:

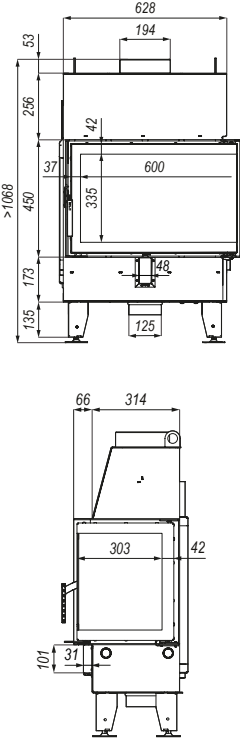

DEFRO HOME IMPULS SM BL/BP G	
nominal power	8 kW
power range	3,2-9,6 kW
energy efficiency class	A
flue size	200 mm
efficiency	80,2 %
flue gas temperature	282°C
the maximum length of chunks	500 mm
minimum air inlet area	400 cm²
minimum air outlet area	560 cm²
weight	~235 kg

- ADDITIONAL EQUIPMENT**
- blackline screen printing
 - removable handle for guillotines


DIMENSIONS IN MM:

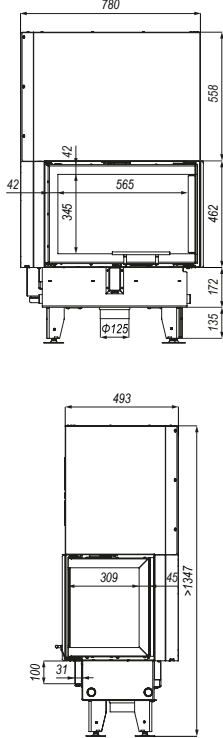

DEFRO HOME IMPULS ME BL/BP	
nominal power	10 kW
power range	4-12 kW
energy efficiency class	A+
flue size	200 mm
efficiency	83,8 %
flue gas temperature	224°C
the maximum length of chunks	700 mm
minimum air inlet area	500 cm²
minimum air outlet area	700 cm²
weight	~175 kg

- ADDITIONAL EQUIPMENT**
- blackline screen printing
 - handle on the other side


DIMENSIONS IN MM:

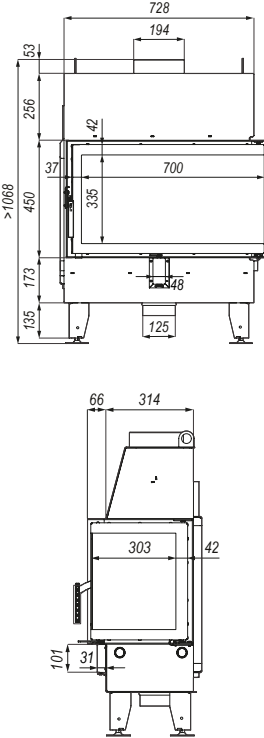

DEFRO HOME IMPULS ME BL/BP G	
nominal power	10 kW
power range	4-12 kW
energy efficiency class	A+
flue size	200 mm
efficiency	83,8 %
flue gas temperature	224°C
the maximum length of chunks	700 mm
minimum air inlet area	500 cm²
minimum air outlet area	700 cm²
weight	~265 kg

- ADDITIONAL EQUIPMENT**
- blackline screen printing
 - removable handle for guillotines

DIMENSIONS IN MM:

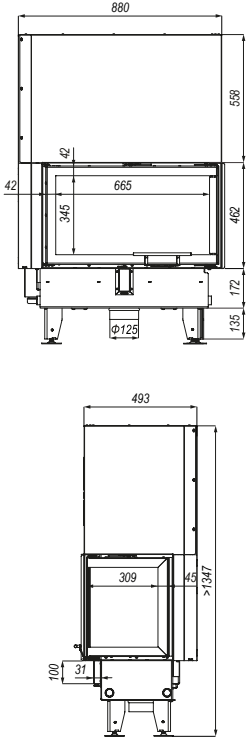

Defro Home Portal series

PORTAL fireplace inserts are devices with the timeless, square type of glazing. Regular shapes of the doors, which due to their sizes are ideal for the conventional, English type of housing. The special design of lower-red furnace allows using the inserts also in the modern housings. Possibility to use the individual solution is a novelty: combustion without ash-pan or directly on the grate.

The series is available in one size of the furnace: ME.

Division of the Defro Home Portal series:

1. Air fireplace inserts with straight glass sheet opening to the side and opening upwards:

- Defro Home Portal ME
- Defro Home Portal ME G



DEFRO HOME PORTAL

DEFRO HOME PORTAL ME



DEFRO HOME PORTAL ME G



Defro Home Portal series

1. Air fireplace inserts with straight glass sheet opening to the side and opening upwards



DEFRO HOME PORTAL ME

nominal power	12 kW
power range	4,8-14,4 kW
energy efficiency class	A+
flue size	200 mm
efficiency	80,5 %
flue gas temperature	248°C
the maximum length of chunks	500 mm
minimum air inlet area	600 cm²
minimum air outlet area	840 cm²
weight	~235 kg

ADDITIONAL EQUIPMENT

- double glass
- black handle
- handle on the other side



DEFRO HOME PORTAL ME G

nominal power	12 kW
power range	4,8-14,4 kW
energy efficiency class	A+
flue size	200 mm
efficiency	80,5 %
flue gas temperature	248°C
the maximum length of chunks	500 mm
minimum air inlet area	600 cm²
minimum air outlet area	840 cm²
weight	~300 kg

ADDITIONAL EQUIPMENT

- double glass
- black handle
- removable handle for guillotines

DIMENSIONS IN MM:

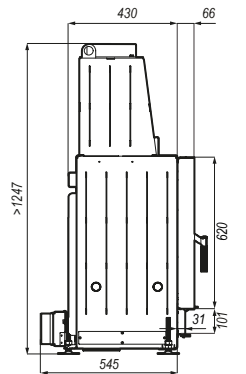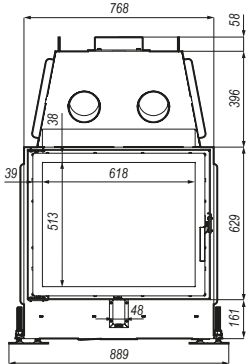

DIMENSIONS IN MM:

