

General catalogue **2022**



ROCAL

MY HOME



Ronde Central

The main character of Ronde is fire. This central fireplace is pure energy and simplicity, while its design allows a total view from anywhere in the room. In addition, due to its compact size it can fit in all spaces.

FEATURES

- Double ventilated hood for hot air.
 - Ceiling plate.
 - Heat resistant, anti-smoke, anti-odour paint.
 - Optional external air inlet.
 - Direct smoke pipe
 - Preheated primary and secondary air.
 - Foot included
- More details:
Page 48-49

Ronde Central

X1345

η	87,2%
 nom	13 kW
	9-15,5 kW
	0,079%
	19 mg/Nm ³
	3,4 kg/h
	180 kg
	33 cm
NOx	106 mg/Nm ³
OGC	61 mg/Nm ³
	UNE EN-13240

A+



AEFECC 7*

Stelle ambientale 4*

CONTO TERMICO

ECODESIGN 2022

Security distances (mm):

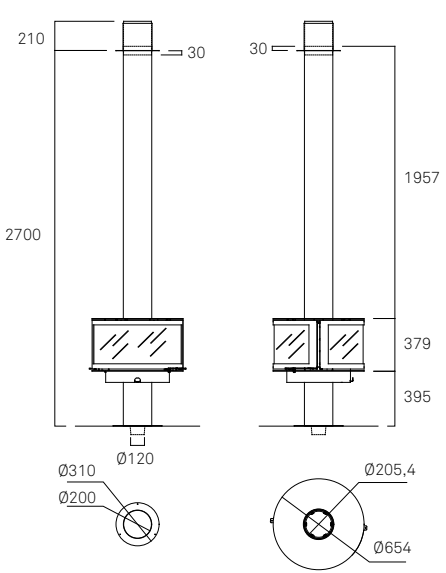







Ronde Central Suspended

Includes an adjustable attachment to affix the fireplace, depending on the conditions of the ceiling.

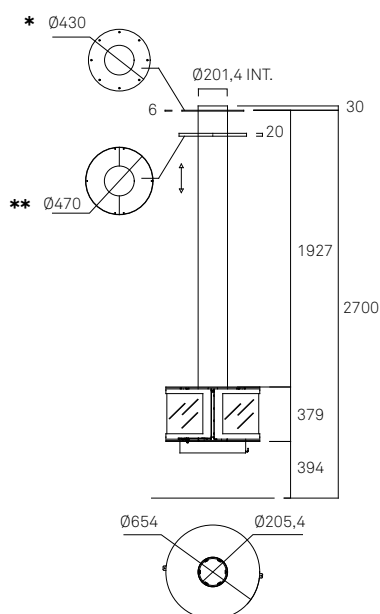

Security distances (mm):



(* Finishing piece welded to the pipe ** Finishing trim for the roof).
For a combustible roof or other requests, please contact our sales department.
For higher roof than 3 meters, it is necessary to hold the pipe with a fasteners or cables.
Please check with our sales department for more information



Born

Born is a triangle-shaped, central freestanding stove. Its three sides, each offering a great view of the fire, make it incredibly transparent with modern, up-to-date, simple lines.

FEATURES

Double ventilated hood for hot air.
Ceiling plate.
Heat resistant, anti-smoke, anti-odour paint.
HRC glass (self-cleaning).
Optional external air inlet.
Direct smoke pipe

Preheated primary and secondary air.
Foot included

More details:
Page 48-49



Born

X1315V2

η	81,1%
nom	12,4 kW
	8,5-15 kW
	0,107%
	29 mg/Nm ³
	3,48 kg/h
	156 kg
	33 cm
NOx	132 mg/Nm ³
OGC	76 mg/Nm ³
	UNE EN-13240



Security distances
(mm):

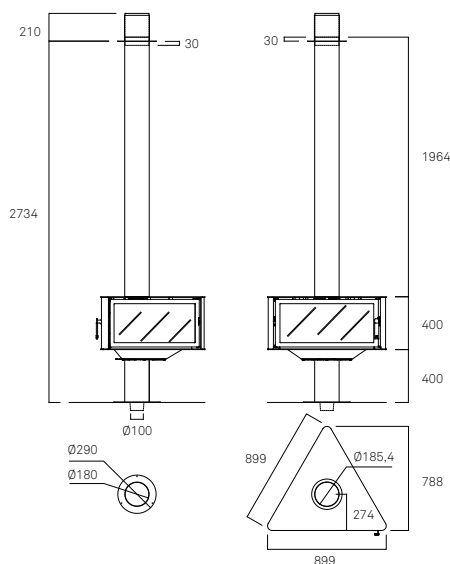







Born Suspended

Includes an adjustable attachment to affix the fireplace, depending on the conditions of the ceiling.

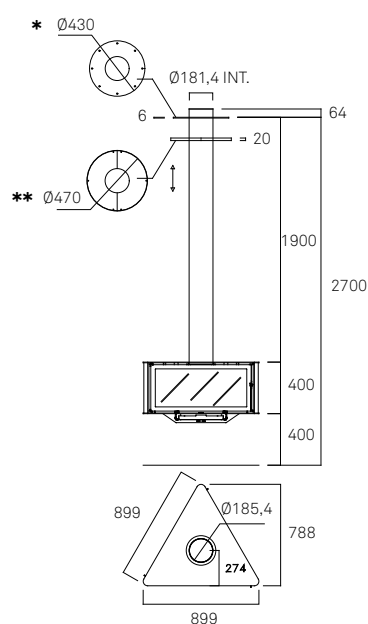

Security distances (mm):



(* Finishing piece welded to the pipe ** Finishing trim for the roof).
For a combustible roof or other requests, please contact our sales department.
For higher roof than 3 meters, it is necessary to hold the pipe with a fasteners or cables.
Please check with our sales department for more information



Ronde Frontal

This fireplace continues the Ronde ethos and concept but in wall fire format that can be enjoyed from anywhere in the living room.

FEATURES

Double ventilated hood for hot air.
Ceiling plate.
Heat resistant, anti-smoke, anti-odour paint.
Ember grate.
Optional external air inlet.
Direct smoke pipe

Preheated primary and secondary air.
Vermiculite lining in black.
Steel-coated vermiculite base.

More details:
Page 48-49

Ronde Frontal

X1340

η	89%
nom	9,7 kW
max	7-11,5 kW
CO	0,094%
PM_{10}	24 mg/Nm ³
kg/h	2,44 kg/h
kg	120 kg
cm	25 cm
NOx	105 mg/Nm ³
OGC	66 mg/Nm ³
UE	UNE EN-13240

A+




AEFECC 7*

Stelle ambientale 4*

CONTO TERMICO

ECODESIGN 2022

Security distances (mm):

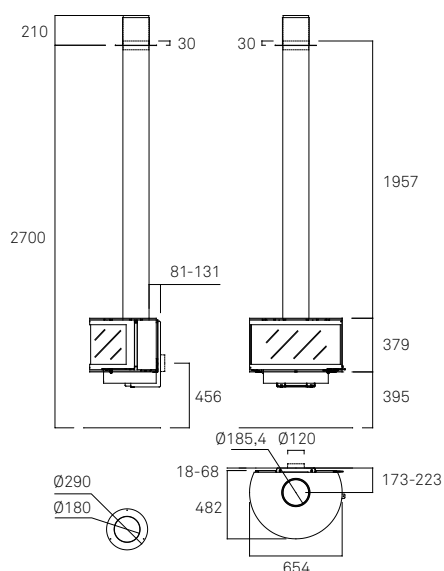

A Ø350
B Ø180
C 300

A4575

Optional stand.



Oval

With an oval finish, this fireplace offers value that borders on excellence. Additionally, its compact shape means that an Oval fireplace can easily fit in any space in the house.

FEATURES

Double ventilated hood for hot air.

Ceiling plate.

Heat resistant, anti-smoke, anti-odour paint.

Preheated primary and secondary air.

Tertiary or safety air.

Optional external air inlet.

Ember grate and ash pan.

Direct smoke pipe

Vermiculite lining in black.

More details:

Page 48-49




Oval

X1325

η	91,1%
 nom	8,4 kW
	6-10 kW
	0,078%
	19,98 mg/Nm ³
	2 kg/h
	112 kg
	33 cm
NOx	86,91 mg/Nm ³
OGC	51,55 mg/Nm ³
	UNE EN-13240



Security distances
(mm):

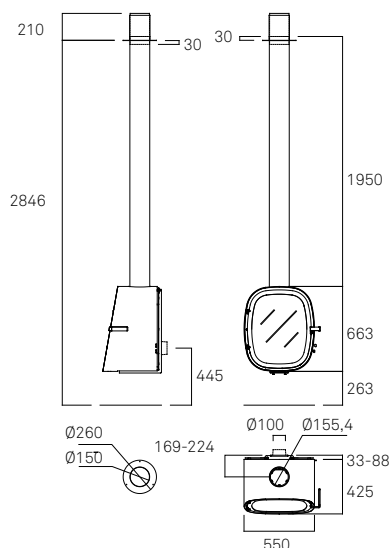

A 220
B 155
C 260



A4565

Optional stand.



Angle

This model stands out for its versatility: it can be fitted as a corner or front-facing fireplace. It also offer some great results.

FEATURES

Double ventilated hood for hot air.
Ceiling plate.
Heat resistant, anti-smoke, anti-odour paint.
Preheated primary and secondary air.
Tertiary or safety air.

Optional external air inlet.
Direct smoke pipe
Vermiculite lining in black.
Steel-coated vermiculite base.

More details:
Page 48-49

Angle

X1330

η	81,3 %
 nom	7,3 kW
	5,5 - 9,5 kW
	0,09 %
	26,14 mg/Nm ³
	1,92 kg/h
	139 Kg
	33 cm
NOx	88,64 mg/Nm ³
OGC	69,78 mg/Nm ³
	UNE EN-13240


A+

AEFECC 7*

Stelle
ambientale 4*


ECODESIGN
2022

Security distances
(mm):




A4565

Optional stand.



A Ø350
B Ø155,4
C 300

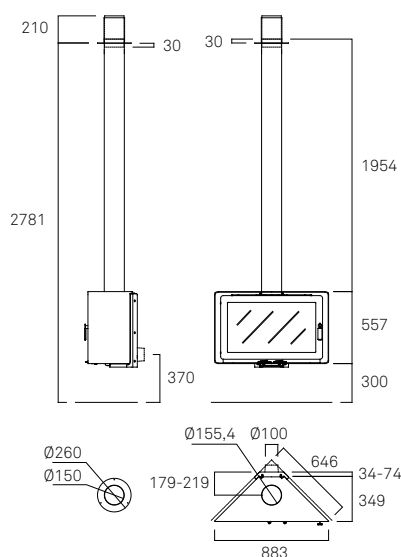







Angle with pivoting support


Angle with pivoting support



X1330-2

90-degree remote-controlled
pivoting wall support



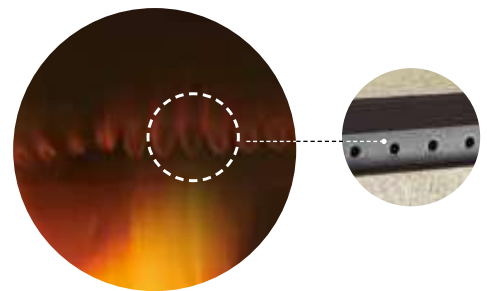

Tertiary or safety air.

Helps to increase performance: represents an extra contribution of oxygen that helps to better burn combustion gases.

Vertex

Architectural, refined and compact, it fits in anywhere. Its double front offers a clear view of the fire. Vertex is modern and current.

FEATURES

Double ventilated hood for hot air.
Ceiling plate.
Heat resistant, anti-smoke, anti-odour paint.
Ember grate and ash pan.
Preheated primary and secondary air.
Tertiary or safety air.
Optional external air inlet.
Direct smoke pipe
Vermiculite lining in black.
HRC glass (self cleaning).

More details:

Page 48-49




Vertex

X1310

η	89,00%
nom	10,5 kW
	7-12,5 kW
CO	0,10%
	24,88 mg/Nm ³
	3 kg/h
	128 kg
	33 cm
NOx	82,98 mg/Nm ³
OGC	68,77 mg/Nm ³
	UNE EN-13240



Security distances (mm):

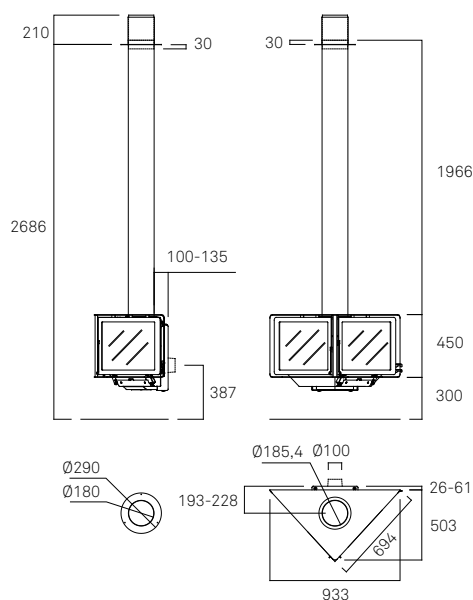

A Ø350
B Ø180
C 205



A4555

Optional round stand.



Combustion chamber.



City

A freestanding stove for urban homes that is ready to stand out in a modern context. Discover its straight lines and how it leaves the fire completely visible. Offers extra firewood capacity with no loss of combustion quality.

FEATURES

Double ventilated hood for hot air.

Ceiling plate.

Heat resistant, anti-smoke, anti-odour paint.

Preheated primary and secondary air.

Tertiary or safety air.

Optional external air inlet.

Direct smoke pipe

Vermiculite lining in black.

Steel-coated vermiculite base.

More details:

Page 48-49

City

X1300V3

η	85,1%
nom	14,1 kW
	9,5 - 17 kW
	0,08%
	28,72 mg/Nm ³
	3,6 kg/h
	152 kg
	40 cm
NOx	62,77 mg/Nm ³
OGC	63,30 mg/Nm ³
	UNE EN-13240

A+




AEFECC 7*

Stelle ambientale 4*

CONTO TERMICO

ECODESIGN 2022


Security distances (mm):

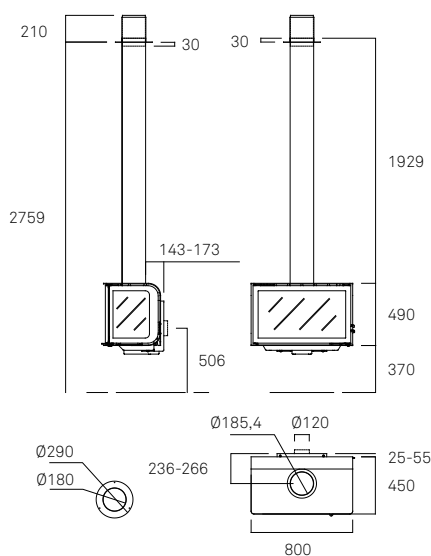

A Ø350
B Ø180
C 300

A4535V3

Optional round stand.

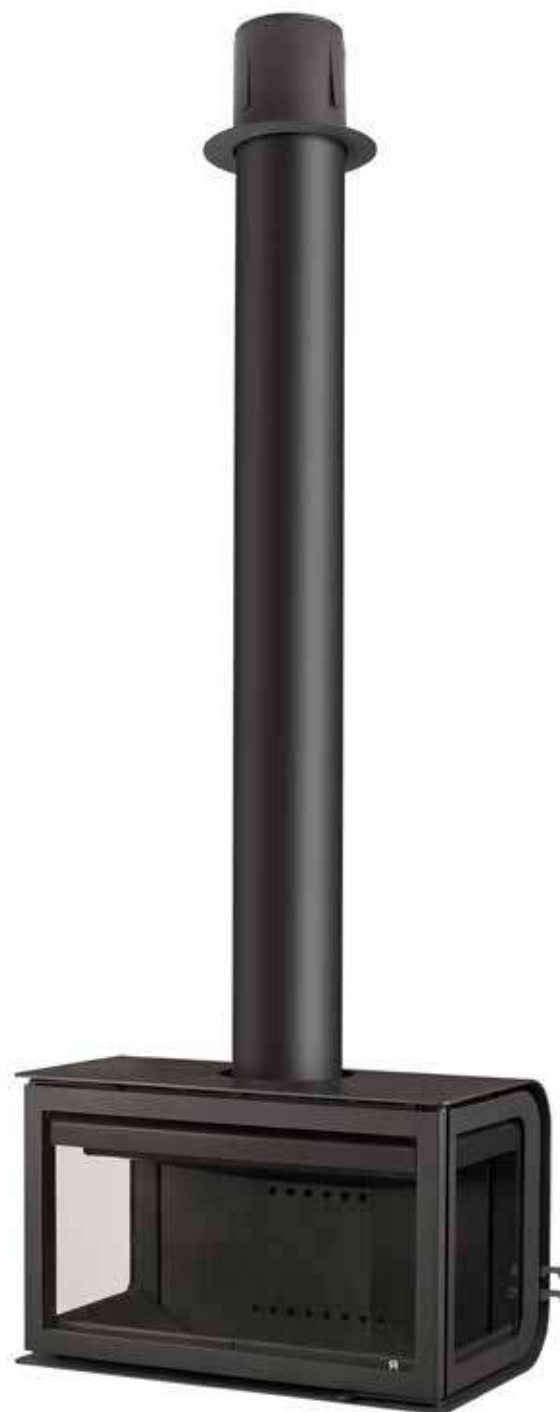





Drop

Drop is sheer emotion. Its vertical line and rounded forms seek to adapt to and, at the same time, become the focal point of your home; with no aim to provoke indifference or to blend in.

FEATURES

- Double ventilated hood for hot air.
- Ceiling plate.
- Heat resistant, anti-smoke, anti-odour paint.
- Preheated primary and secondary air.
- Tertiary or safety air.
- Optional external air inlet.




- Ember grate and ash pan.
- Direct smoke pipe
- Vermiculite lining in black.

More details:
Page 48-49

Drop	
X1320	
	85,03%
	9,9 kW
	6,5 - 11,5 kW
	0,093%
	9 mg/Nm³
	2,64 kg/h
	148 kg
	33 cm
NOx	113 mg/Nm³
OGC	68 mg/Nm³
	UNE EN-13240



Security distances
(mm):

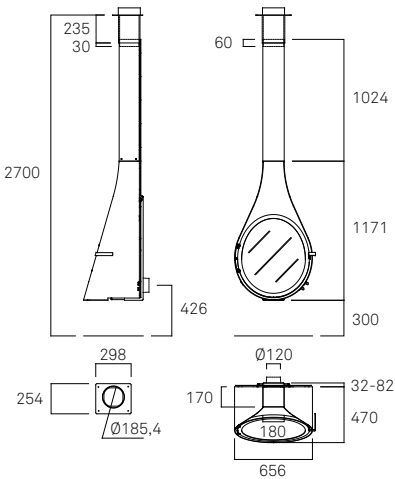

A4560
Optional round stand.

Mini Drop

This reduced format of the popular Drop fireplace still brings the same emotion but with more possibilities.

FEATURES

Double ventilated hood for hot air.
Ceiling plate.
Heat resistant, anti-smoke, anti-odour paint.
Preheated primary and secondary air.
Tertiary or safety air.
Optional external air inlet.

Ember grate and ash pan.
Direct smoke pipe
Vermiculite lining in black.

More details:
Page 48-49



Mini Drop

X1321



η	85,1%
nom	8,1 kW
flame	3,8 - 9,5 kW
CO	0,073%
mg/Nm^3	29,2 mg/Nm ³
kg/h	2,14 kg/h
kg	113 kg
cm	25 cm
NOx	92 mg/Nm ³
OGC	63 mg/Nm ³
UE	UNE EN-13240



Security distances
(mm):

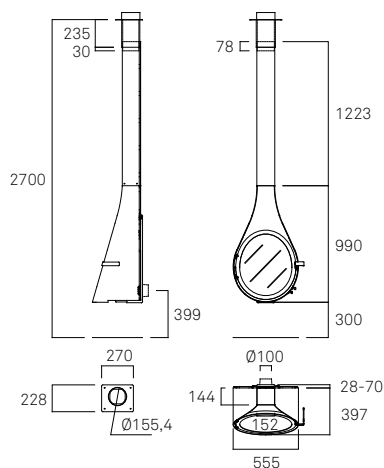

Combustion chamber
(back): external air inlet and
combustion air preheating.



A Ø330
B Ø170
C 300

A4561

Optional round stand.



This model offers a fire vision from the front and the sides. Screen-printed glass. This stove can be suspended or in a foot and will oustand in any atmosphere.

Page 48-49

Rocal



D-7

Its size and looks make the D-7 one of our most popular modern freestanding stoves: it fits in in any contemporary-style home and is outstandingly versatile. A great little freestanding stove.

FEATURES

Double ventilated hood for hot air.
Ceiling plate.
Heat resistant, anti-smoke, anti-odour paint.
Ember grate and ash pan.
Preheated primary and secondary air.
Tertiary or safety air.
Optional external air inlet.

Direct smoke pipe
Vermiculite lining in black.

More details:
Page 48-49



D-7

X1280V5

η	88%
 nom	6,6 kW
	4,5-8 kW
	0,098%
	13,7 mg/Nm ³
	1,71 kg/h
	113 kg
	33 cm
NOx	99 mg/Nm ³
OGC	67 mg/Nm ³
	UNE EN-13249




Security distances
(mm):

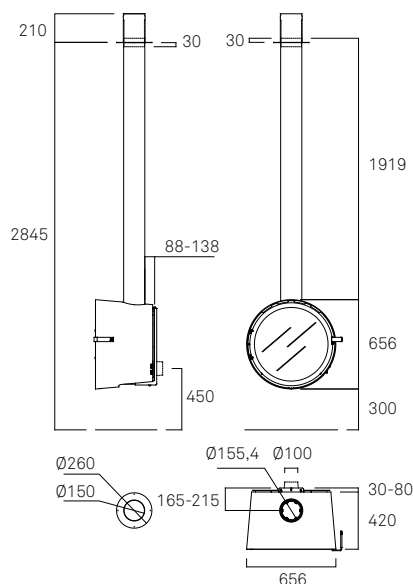

A4520

Optional round stand.



A Ø350
B Ø180
C 300



Gala

This impressive central freestanding stove is synonymous with elegance and distinction. The focal point of any living room, it also achieves great energy efficiency. Gala is exclusive.

FEATURES

Double ventilated hood for hot air.
Ceiling plate.
Heat resistant, anti-smoke, anti-odour paint.
Ember grate and ash pan removal from the bottom.

Optional external air inlet.
Cover pipe (needs internal smoke pipe).
Preheated primary and secondary air.

More details:
Page 48-49

Gala

X1222V3

η	83,7%
nom	17,4 kW
flame	12,5-20,5 kW
CO	0,082%
mg/Nm^3	12 mg/Nm ³
kg/h	4,76 kg/h
kg	297 kg
cm	40 cm
NOx	95 mg/Nm ³
OGC	39 mg/Nm ³
UNE EN-13240	



A⁺

AEFECC 7⁺

Stelle ambientale 4[★]

ECODESIGN 2022

Security distances (mm):

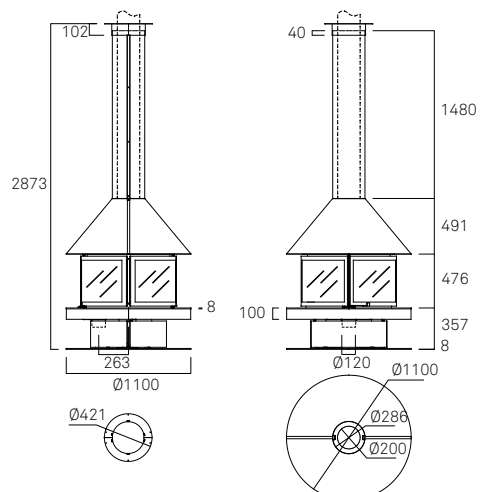



Giselle 90

A central freestanding stove for those who love a real fire and good conversation, Giselle is a great reason to gather around the fire.

FEATURES

Double ventilated hood for hot air.
Ceiling plate.
Heat resistant, anti-smoke, anti-odour paint.
Ember grate and ash pan removal from the bottom.
Optional external air inlet.

Cover pipe.
Preheated primary and secondary air.
Four doors with automatic closure on loading door.

More details:
Page 48-49



Giselle 90

X1273

η	77,5%
 nom	15 kW
	10,5-18 kW
	0,088%
	8 mg/Nm ³
	4,34 kg/h
	325 kg
	40 cm
NOx	105 mg/Nm ³
OGC	68 mg/Nm ³
	UNE EN-13240



Security distances
(mm):

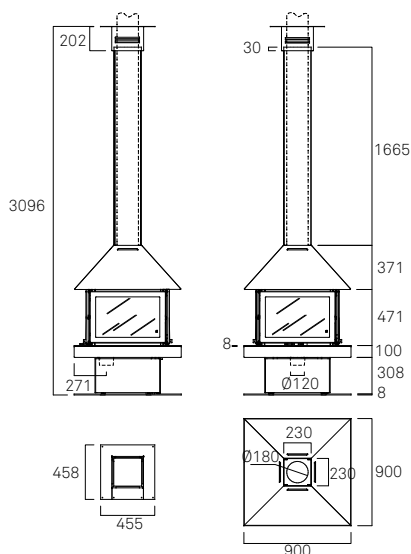



General features



Ceiling plate.




Ceiling attachment for flue cover.



Glass-ceramic glass.



External air inlet.
Guarantees that the air in the house is healthier. Does not interfere with domestic air extraction devices, such as those in the kitchen and bathroom.



Combustion chamber (back): external air inlet and combustion air preheating.



Tertiary or safety air.
Makes an extra contribution of oxygen that enables the combustion gases to burn better.



Primary and secondary register.
Provides oxygen for the lower and upper part of the glass.



Ember grate and ash pan.

Born
Vertex
Drop
Mini Drop

Oval
D-7



Cover pipe.



Direct smoke pipe



Ember grate and ash pan removal from below.


Gisele 90
Gala



Vermiculite lining in black.


In all the models

Custom adaptations

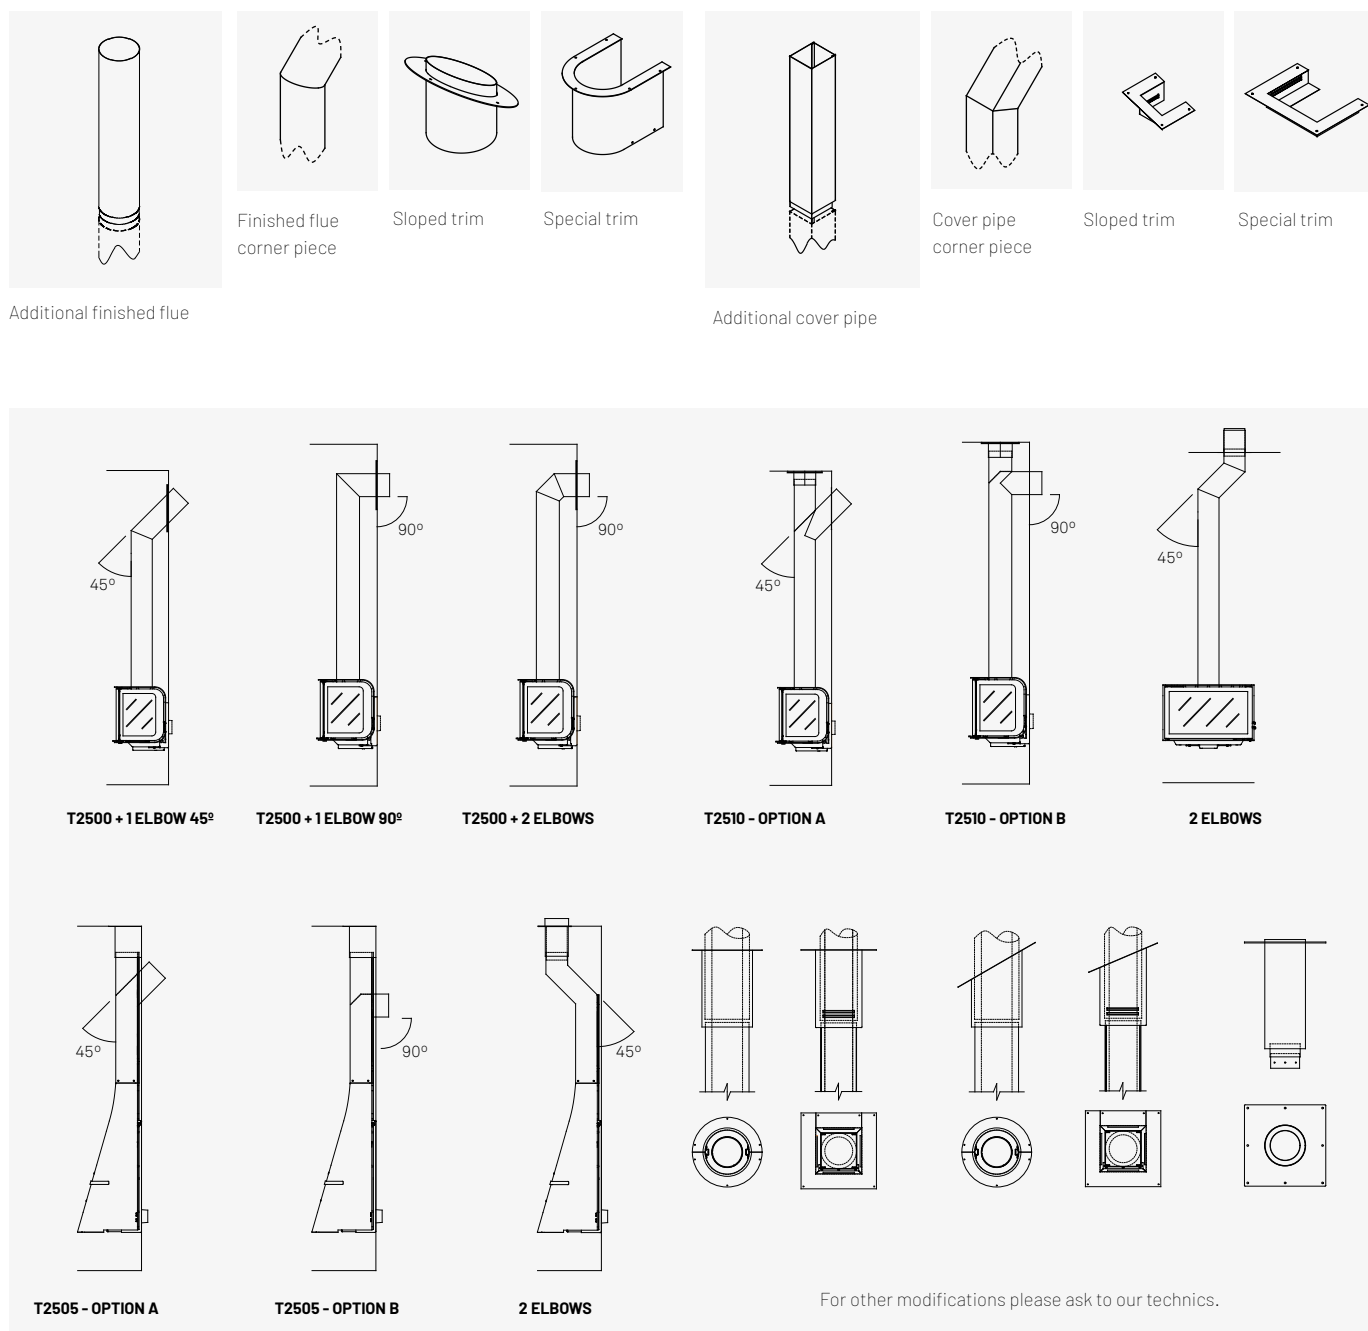


Measuring the pitch angle

Using spirit level

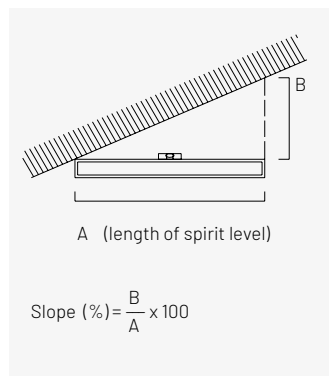


Using a tape measure

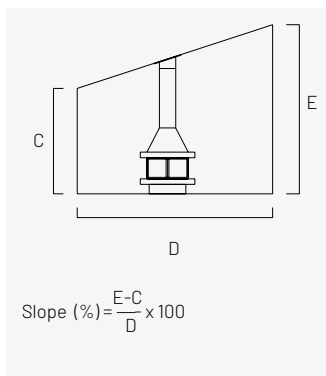


Measuring the height

Frontal fireplace

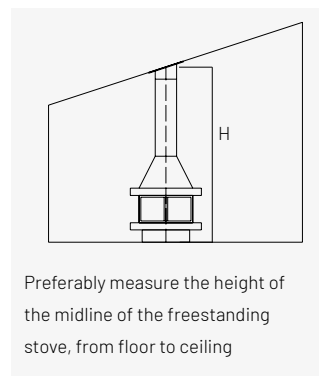

Corner fireplace

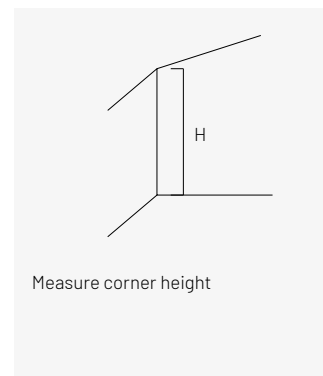

02.


Freestanding stoves

With the Habit range you can personalise your stove as much as you want. From our basic designs, you can choose between different sizes, formats, fire windows and fans systems for maximum efficiency.


Also available with lower wood store, metal bench unit and wall-mounting version.

Also in this section, take a look at our Hebar model, a stove-oven-barbecue unit that's a heater and a cooker all in one.


Frontal

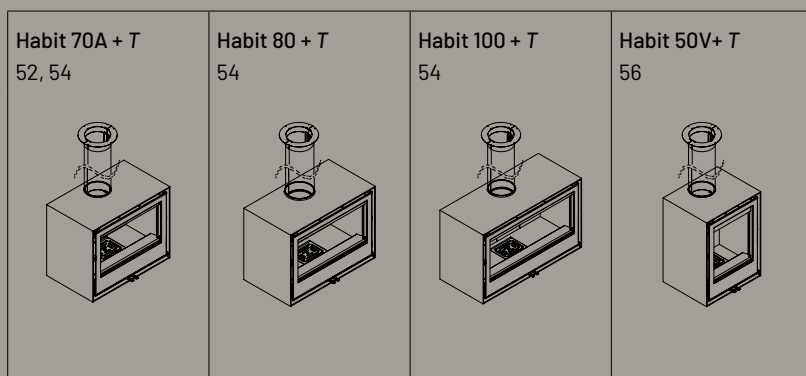


Three sided view

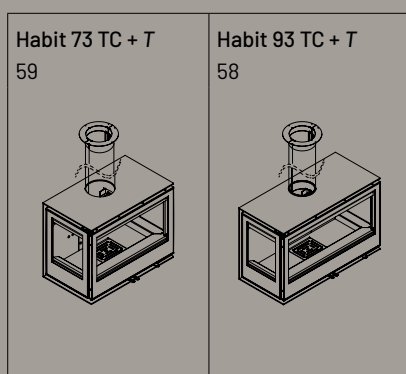


Lateral view

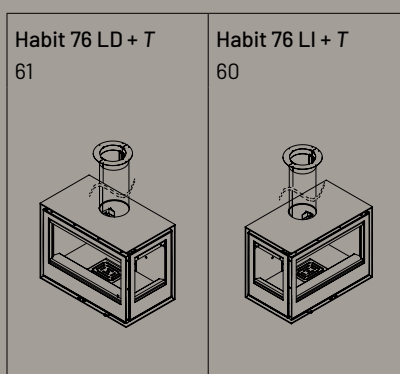


Double sided view

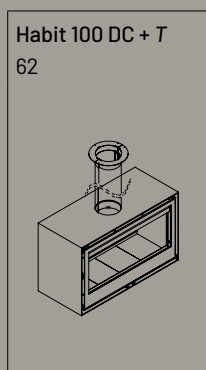


Corner

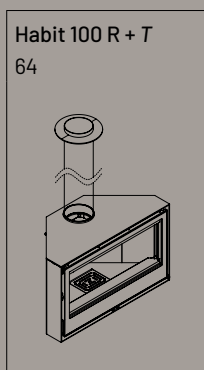

Stove-Oven-Barbecue

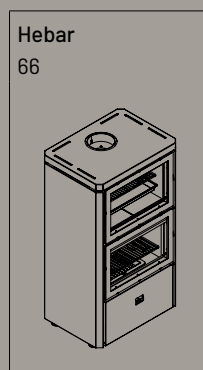

Optional items

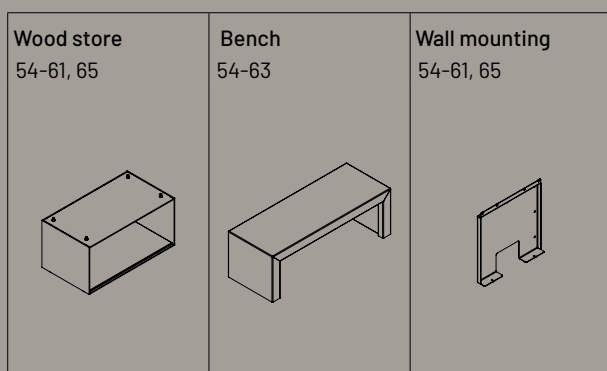








Habit +T

FEATURES

Reversible front door.
Steel combustion chamber.
Vermiculite inner lining.
Wraparound casing in 6 mm steel.
Optional external air inlet.
Preheated primary and secondary air.
Tertiary or security air.
Ash pan removal from the front.
Double deflector, top deflector with two-position adjustable flow.
Two or four fans unit with two automatic speed settings and one manual.

Can be supplied without fans unit on request.

More details: Page 112

	Habit 70A +T E2110V2+T	Habit 80 +T E2120V2+T	Habit 100 +T E2130V2+T
	85,30%	85,30%	86,2%
	8,8 kW	9 kW	12,1 kW
	6-10,5 kW	6,5-11,5 kW	7,5-13 kW
	0,062%	0,062%	0,09%
	23 mg/Nm ³	23 mg/Nm ³	18 mg/Nm ³
	2,37 kg/h	2,44 kg/h	3,19 kg/h
	160 kg	187 kg	221 kg
	45 cm	50 cm	60 cm
NOx	106 mg/Nm ³	106 mg/Nm ³	101 mg/Nm ³
OGC	51 mg/Nm ³	51 mg/Nm ³	59 mg/Nm ³
Safe Distance mm			
	UNE EN-13240 UNE EN-60335	UNE EN-13240 UNE EN-60335	UNE EN-13240 UNE EN-60335

A+

AEFECC 7*

Stelle ambientale 4*

CONTO TERMICO

ECODESIGN 2022

A+

AEFECC 7*

Stelle ambientale 4*

CONTO TERMICO

ECODESIGN 2022

A+

AEFECC 7*

Stelle ambientale 4*

CONTO TERMICO

ECODESIGN 2022

OPTIONAL ITEMS



E2110-2 Wood store Habit 70 A +T (686x400x410 mm)

E2120-2 Wood store Habit 80 +T (780x400x430 mm)

E2130-2 Wood store Habit 100 +T (980x400x430 mm)



E2110-1 Wall mounting kit Habit 70 A +T

E2120-1 Wall mounting kit Habit 80 +T

E2130-1 Wall mounting kit Habit 100 +T




E2190 Bench unit 1000 mm (1000x400x450 mm)

E2192 Bench unit 1200 mm (1200x400x450 mm)

E2194 Bench unit 1400 mm (1400x400x450 mm)


E2196 Bench unit 1600 mm (1600x400x450 mm)

Habit 70 A +T






2 fans unit with 2 automatic speed settings and 1 manual.

Habit 80 +T / Habit 100 +T



4 fans unit with 2 automatic speed settings and 1 manual.

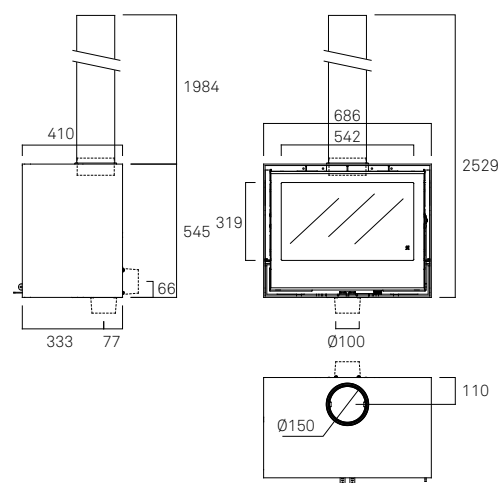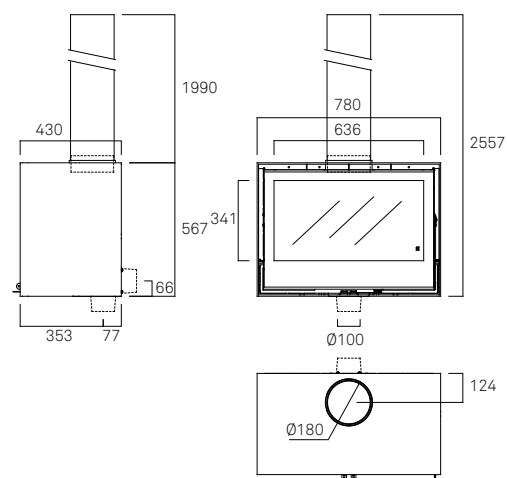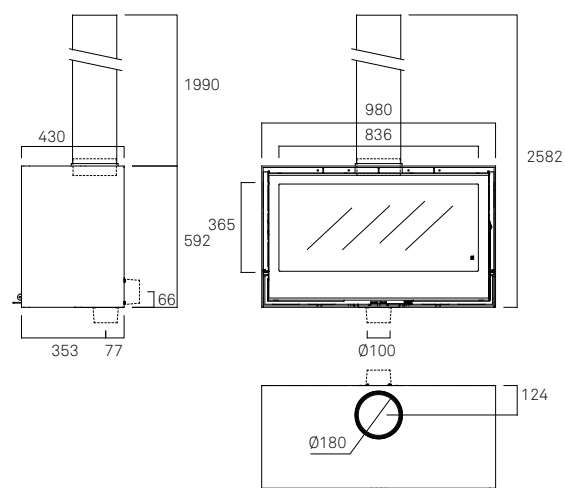**Habit 70 A +T****Habit 80 +T****Habit 100 +T**



Habit V +T

FEATURES

Reversible front door.
Steel combustion chamber.
Vermiculite inner lining.
Wraparound casing in 6 mm steel.
Optional external air inlet.
Preheated primary and secondary air.
Tertiary or security air.
Ash pan removal from the front.
Double deflector, top deflector with two-position adjustable flow.
Two fans unit with two automatic speed settings and one manual.
Except ARc 40V (without fans).

Can be supplied without fans unit on request.

More details: Page 112


Habit 50V +T

E2100V2+T

η	86,30%
nom	8,7 kW
	5,5-9,5 kW
	0,048%
	13 mg/Nm ³
	2,3 kg/h
	154 kg
	33 cm
NOx	102 mg/Nm ³
OGC	51 mg/Nm ³
Safe Distance mm	500
	UNE EN-13240 UNE EN-60335



Habit 50 V +T

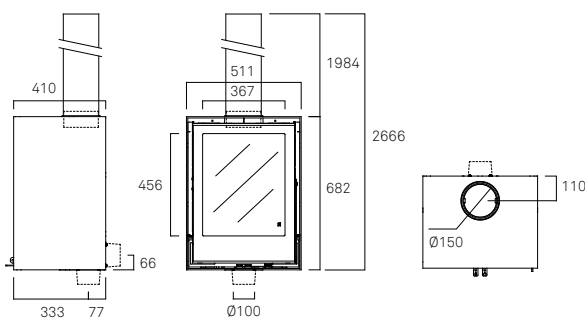

OPTIONAL ITEMS



E2100-2 Wood store Habit 50 V +T (511x400x410 mm)



E2100-1 Wall mounting kit Habit 50 V +T



E2190 Bench unit 1000 mm (1000x400x450 mm)
E2192 Bench unit 1200 mm (1200x400x450 mm)
E2194 Bench unit 1400 mm (1400x400x450 mm)
E2196 Bench unit 1600 mm (1600x400x450 mm)





Habit TC +T

FEATURES

Steel combustion chamber.
Vermiculite inner lining.
Wraparound casing in 6 mm steel.
Optional external air inlet.
Preheated primary and secondary air.
Tertiary or safety air.
Ash pan removal from front.
Double deflector, top deflector with two-position adjustable flow.
Two or four fans unit with two automatic speed settings and one manual.

Can be supplied without fans unit on request.

More details: Page 112

	Habit 73 TC +T E2140+T	Habit 93 TC +T E2145+T
η	85,01%	79,6%
 nom	11,1 kW	12,4 kW
	7,5-13 kW	8,5-14,5 kW
	0,09%	0,085%
	38,76 mg/Nm ³	20 mg/Nm ³
	2,8 kg/h	3,56 kg/h
	175 kg	196 kg
	45 cm	60 cm
NO _x	71,5 mg/Nm ³	126 mg/Nm ³
OGC	36,69 mg/Nm ³	48 mg/Nm ³
Safe Distance mm		
	UNE EN-13229 UNE EN-60335	UNE EN-13229 UNE EN-60335
		
		
		
		
		

OPTIONAL ITEMS



E2140-2 Wood store Habit 73 TC +T
(730x400x430 mm)
E2145-2 Wood store Habit 93 TC +T
(930x400x430 mm)




E2120-1 Wall mounting kit Habit 73 TC +T
E2130-1 Wall mounting kit Habit 93 TC +T




E2190 Bench unit 1000 mm (1000x400x450 mm)
E2192 Bench unit 1200 mm (1200x400x450 mm)
E2194 Bench unit 1400 mm (1400x400x450 mm)
E2196 Bench unit 1600 mm (1600x400x450 mm)

Habit 73 TC +T

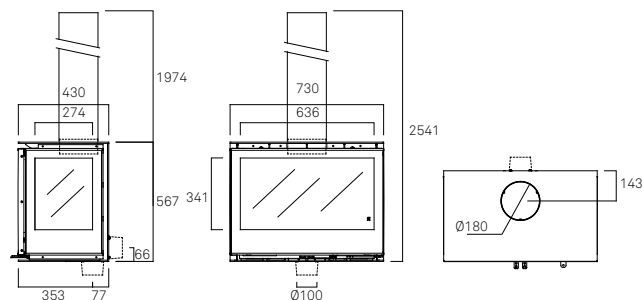

Habit 93 TC +T

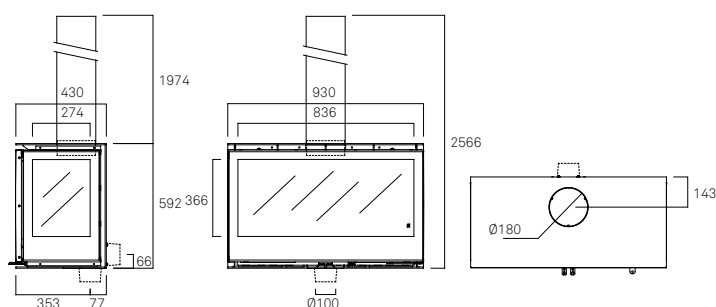



Habit LD/LI +T

FEATURES

Steel combustion chamber.
Vermiculite inner lining.
Wraparound casing in 6 mm steel.
Optional external air inlet.
Preheated primary and secondary air.
Tertiary or safety air.
Ash pan removal from front.
Double deflector, top deflector with two-position adjustable flow.
Two fans unit with two automatic speed settings and one manual.

Can be supplied without fans unit on request.

More details: Page 112

Habit 76 LD +T Habit 76 LI +T
E2150+T E2155+T

η	77,3%
$\dot{Q}_{nom}$	9,4 kW
$\dot{Q}_{min}$	6,5-11 kW
CO	0,08%
mg/Nm^3	16 mg/Nm ³
kg/h	2,8 kg/h
kg	176 kg
cm	40 cm
NOx	104 mg/Nm ³
OGC	66 mg/Nm ³
Safe Distance mm	



UNE EN-13240
UNE EN-60335

A

AEFECC 7*

Stelle ambientale 4*

ECODESIGN 2022


WOOD

02.


Freestanding stoves



Habit 76 LD +T

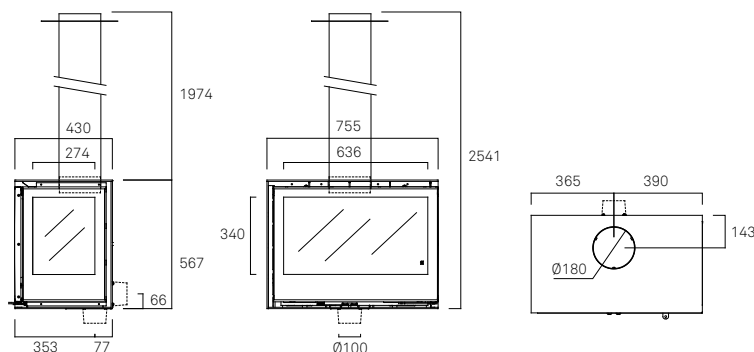

Habit 76 LI +T

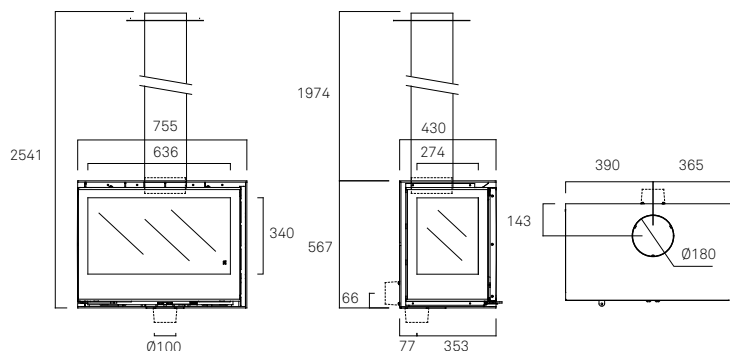

OPTIONAL ITEMS



E2150-2 Wood store 76 LD/LI +T
(755x400x430 mm)

It only allows the external air inlet through the connector on the back.



E2120-1 Wall mounting
kit Habit 76 LD/LI +T



E2190 Bench unit 1000 mm (1000x400x450 mm)
E2192 Bench unit 1200 mm (1200x400x450 mm)
E2194 Bench unit 1400 mm (1400x400x450 mm)
E2196 Bench unit 1600 mm (1600x400x450 mm)



Habit DC +T

FEATURES

Reversible doors.
Steel combustion chamber.
Vermiculite inner lining.
Wraparound casing in 6 mm steel.
Preheated primary and secondary air.

Double deflector, lower deflector with two-position adjustable flow.
Steel-coated vermiculite base.

More details: Page 112

Habit 100 DC +T

E2175+T

η	75,90 %
 nom	13,4 kW
	9-16 kW
	0,101 %
	16 mg/Nm ³
	4 kg/h
	228 kg
	60 cm
NOx	102 mg/Nm ³
OGC	81 mg/Nm ³
Safe Distance mm	750 750 1000



UNE EN-13240

A


AEFECC 7*

Stelle ambientale 3*

ECODESIGN 2022



Habit 100 DC +T

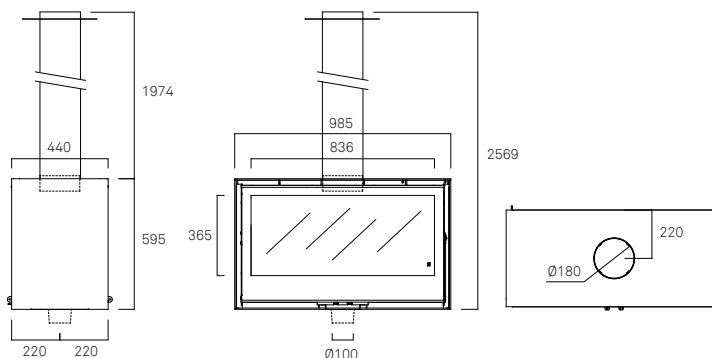

OPTIONAL ITEMS



E2175-2 Wood store Habit 100 DC +T
(985x400x440 mm)

It does not allow external air inlet.



E2190 Bench unit 1000 mm (1000x400x450 mm)
E2192 Bench unit 1200 mm (1200x400x450 mm)
E2194 Bench unit 1400 mm (1400x400x450 mm)
E2196 Bench unit 1600 mm (1600x400x450 mm)



Habit R +T

FEATURES


Reversible doors.
Steel combustion chamber.
Vermiculite inner lining.
Wraparound casing in 6 mm steel.
Please ask about the option of external air inlet.

Preheated primary and secondary air.
Double deflector, lower deflector with two-position adjustable flow.
Steel-coated vermiculite base.

More details: Page 112

Habit 100 R +T

E2180V2+T


η	85,3%
 nom	11 kW
	7,5-12,5 kW
	0,09%
	23 mg/Nm ³
	2,8 kg/h
	186 kg
	40 cm
NOx	106 mg/Nm ³
OGC	59 mg/Nm ³
Safe Distance mm	



UNE EN-13240
UNE EN-60335



Habit 100 R +T

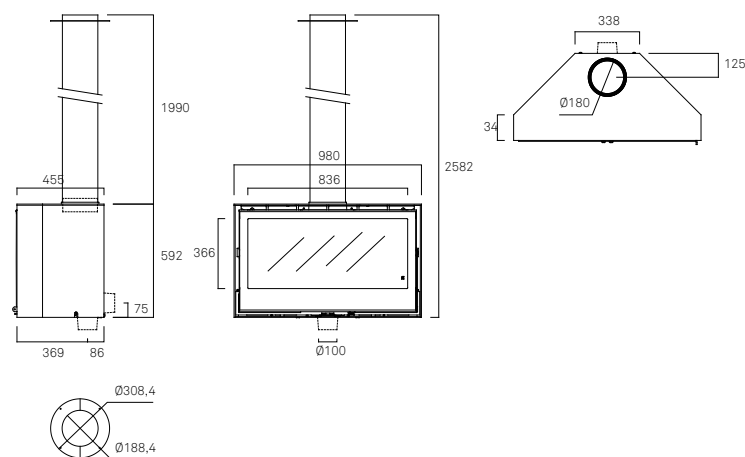

OPTIONAL ITEMS



E2180-2 Wood store Habit 100 R +T
(985x400x455 mm)



E2180-1 Wall mounting
kit Habit 100 R +T



Hebar

Hebar is one of the most complete and efficient products on the market and thanks to its high efficiency, it also has the ability to heat a large area. The same inertia of the stove keeps the heat for cooking in the oven until about 3 hours after the last loading.

STOVE FEATURES:

Optional external air inlet.

Preheated primary and secondary air.

Tertiary or safety air.

Ash drawer front extraction

Bottom hinged door allows depositing the grid and avoid soiling.

OVEN FEATURES:

Vitrified steel Oven.

Steel grill and vitrified steel plate.

Capacity: 78 litres

Thermometer included

BARBECUE FEATURES:

Stainless steel grill

More details: Page 48-49

Hebar

E3000


η	81,40%
nom	12,21 kW
	8,5-14,5 kW
CO	0,11%
	25,38 mg/Nm ³
kg/h	3,4 kg/h
kg	254 kg
cm	45 cm
NOx	64,48 mg/Nm ³
OGC	76,17 mg/Nm ³

A+

AEFECC 7*

Stelle ambientale 3*

ECODESIGN 2022



UNE EN-13240

